



Helical Gear Reducers

EUR TRANSMISSION CORP.

Helical geared motors and helical gear units

SE



PAM



With Motors

SEF




B5



V1


SE-K



With Input Shaft

DESCRIPTION OF TYPE & MODEL

R2/3 - 2/3 STAGES GEAR UNITS

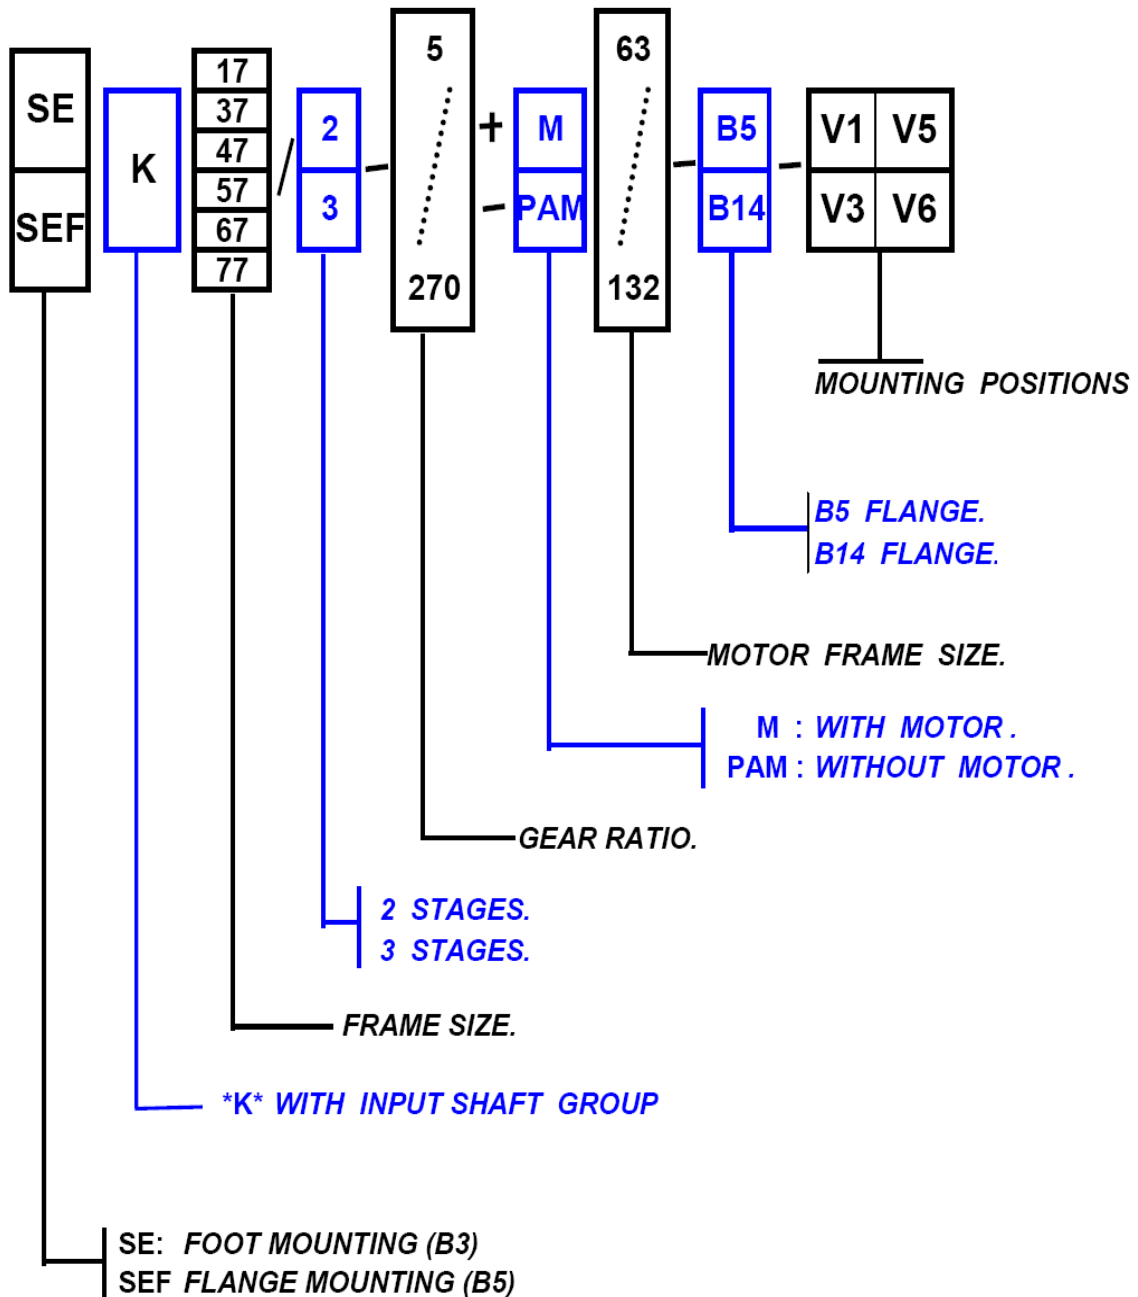

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
63B4 0.18 kw 1/4 HP	4.797	300	5.50	>3.00	17/2	360	4.58	>3.00	17 18
	5.979	240	6.84	>3.00		288	5.70	>3.00	
	7.103	200	8.13	>3.00		240	6.78	>3.00	
	8.001	180	9.16	>3.00		216	7.63	>3.00	
	9.080	158	10.4	>3.00		326	8.67	>3.00	
	9.929	145	11.4	>3.00		174	9.50	>3.00	
	12.86	112	14.7	>3.00		134	12.3	>3.00	
	15.08	95.5	17.3	>3.00		114	14.4	>3.00	
	17.98	80.0	20.6	>3.00		96.0	17.2	>3.00	
	19.79	72.7	22.7	>3.00		87.2	18.9	>3.00	
	24.50	58.7	28.0	>3.00		7.05	23.4	>3.00	
	31.57	45.6	36.2	2.34		54.7	30.2	2.83	
	24.36	59.0	27.3	>3.00	17/3	70.9	22.7	>3.00	19 20
	31.52	45.6	35.3	2.84		54.7	29.4	>3.00	
	38.88	37.0	43.5	2.29		44.5	36.3	2.75	
	45.23	31.8	50.6	1.97		38.2	42.2	2.37	
	53.27	27.0	59.7	1.67		32.4	49.7	2.01	
	70.36	20.4	78.8	1.26		24.5	65.7	1.52	
	88.03	16.3	98.6	1.01		19.6	82.2	1.21	
	113.08	12.7	126	*0.8		15.2	*0.96	*0.80	
	60.15	23.9	67.4	2.96	37/3	28.7	56.2	>3.00	
	68.53	21.0	76.8	2.60		25.2	64.0	>3.00	
	75.60	19.0	84.7	2.36		22.8	70.6	2.85	
	84.42	17.0	94.5	2.11		20.4	78.8	2.53	
	93.60	15.3	105	1.90		18.4	87.4	2.28	
	99.75	14.4	112	1.78		17.3	93.2	2.14	
	106.67	13.5	120	1.66		16.2	100	1.99	
	117.60	12.2	132	1.51		14.6	109	1.81	
	123.50	11.6	138	1.45		13.9	115	1.74	
	139.99	10.2	157	1.27		12.3	130	1.53	
	155.16	9.28	174	1.15		11.1	145	1.38	
	173.32	8.30	194	1.03		9.97	162	1.23	
	192.10	7.49	215	*0.93	47/3	8.99	180	1.11	21 22
	217.75	6.61	240	*0.83		7.93	200	1.00	
	269.59	5.34	300	*0.66		6.40	250	*0.80	
	149.63	9.62	167	1.78		11.5	139	2.14	
	173.32	8.30	194	1.54		9.97	162	1.85	
	185.25	7.77	207	1.44		9.32	173	1.73	
	210.00	6.85	235	1.27	57/3	8.22	196	1.52	23 24
	260.00	5.53	291	1.03		6.64	242	1.23	
	210.00	6.85	235	1.91		8.22	196	2.29	
	260.00	5.53	291	1.54		6.64	242	1.85	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
63C4 0.25 kw 1/3 HP	4.797	300	7.63	>3.00	17/2	360	6.35	>3.00	17 18
	5.979	240	9.50	>3.00		288	7.92	>3.00	
	7.103	200	11.3	>3.00		240	9.41	>3.00	
	8.001	180	12.7	>3.00		216	10.6	>3.00	
	9.080	158	14.4	>3.00		326	12.0	>3.00	
	9.929	145	15.8	>3.00		174	13.2	>3.00	
	12.86	112	20.4	>3.00		134	17.0	>3.00	
	15.08	95.5	24.0	>3.00		114	20.0	>3.00	
	17.98	80.0	28.6	2.97		96.0	23.8	>3.00	
	19.79	72.7	31.5	2.69		87.2	26.2	>3.00	
	24.50	58.7	38.9	2.18		70.4	32.4	2.62	
	31.57	45.6	50.2	1.69		54.7	41.8	2.03	
	24.36	59.0	37.9	2.63	17/3	70.9	31.6	>3.00	
	31.52	45.6	49.0	2.04		54.7	40.9	2.44	
	38.88	37.0	60.5	1.65		44.5	50.4	1.98	
	45.23	31.8	70.4	1.42		38.2	58.7	1.70	
	53.27	27.0	82.9	1.20		69.1	69.0	1.44	
	70.36	20.4	109	*0.91	37/3	24.5	91.3	1.10	19 20
	60.15	23.9	93.6	2.13		28.7	78.0	2.56	
	68.53	21.0	106	1.88		25.2	89.0	2.25	
	75.60	19.0	117	1.70		22.8	98.0	2.04	
	84.42	17.0	131	1.52		20.4	109	1.83	
	93.60	15.3	145	1.38		18.4	121	1.65	
	99.75	14.4	155	1.29		17.3	129	1.55	
	106.67	13.5	166	1.20		16.2	138	1.44	
	117.60	12.2	183	1.09		14.6	152	1.31	
	123.50	11.6	192	1.04		13.9	160	1.25	
	139.99	10.2	218	*0.91	47/3	12.3	181	1.10	21 22
	113.40	12.6	176	1.70		15.2	147	2.04	
	123.50	11.6	192	1.56		13.9	160	1.87	
	139.99	10.2	218	1.37		12.3	181	1.65	
	149.63	9.62	232	1.28		11.5	194	1.54	
	173.32	8.30	269	1.11		9.97	224	1.33	
	185.25	7.77	288	1.04		9.32	240	1.24	
	210.00	6.85	326	*0.92		8.22	272	1.10	
	260.00	5.53	404	*0.75	57/3	6.64	337	*0.90	23 24
	173.32	8.30	269	1.67		9.97	224	2.00	
	185.25	7.77	288	1.56		9.32	240	1.87	
	210.00	6.85	326	1.37		8.22	272	1.65	
	260.00	5.53	404	1.11		6.64	337	1.33	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
71B4 0.37 kw 1/2 HP	4.797	300	11.3	>3.00	17/2	360	9.41	>3.00	17 18
	5.979	240	14.0	>3.00		288	11.7	>3.00	
	7.103	200	16.7	>3.00		240	13.9	>3.00	
	8.001	180	18.8	>3.00		216	15.7	>3.00	
	9.080	158	21.4	>3.00		326	17.8	>3.00	
	9.929	145	23.4	>3.00		174	19.5	>3.00	
	12.86	112	30.2	2.71		134	25.2	>3.00	
	15.08	95.5	35.5	2.39		114	29.5	2.87	
	17.98	80.0	42.3	2.00		96.0	35.2	2.40	
	19.79	72.7	46.5	1.82		87.2	38.8	2.19	
	24.50	58.7	57.6	1.47		70.4	48.0	1.77	
	31.57	45.6	74.3	1.14		54.7	61.9	1.30	
	24.36	59.0	56.0	1.78	17/3	70.9	46.7	2.14	
	31.52	45.6	72.5	1.37		54.7	60.4	1.65	
	38.88	37.0	89.4	1.11		44.5	74.5	1.34	
	45.23	31.8	104	*0.96		38.2	86.7	1.15	
	32.67	44.0	76.8	2.60	37/2	52.8	64.0	>3.00	19 20
	40.44	35.6	95.2	2.10		42.7	79.3	2.52	
	45.63	31.5	108	1.85		37.8	90.0	2.22	
	48.85	29.4	112	1.78	37/3	35.3	93.6	2.14	
	53.33	27.0	122	1.64		32.4	102	1.96	
	60.15	23.9	138	1.45		28.7	115	1.74	
	68.53	21.0	157	1.27		25.2	131	1.52	
	75.60	19.0	173	1.15		22.8	145	1.38	
	84.42	17.0	194	1.03		20.4	162	1.23	
	93.60	15.3	215	*0.93		18.4	179	1.11	
	68.53	21.0	157	1.91	47/3	25.2	131	2.29	
	75.60	19.0	173	1.73		22.8	145	2.08	
	84.42	17.0	194	1.54		20.4	162	1.85	
	93.60	15.3	215	1.39		18.4	179	1.67	
	99.75	14.4	229	1.31		17.3	191	1.57	
	102.86	14.0	236	1.27		16.8	197	1.52	
	113.40	12.6	260	1.15		15.2	217	1.38	
	123.50	11.6	284	1.06		13.9	236	1.26	
	139.99	10.2	321	*0.93		12.3	268	1.12	
	102.86	14.0	236	1.90	57/3	16.8	197	2.28	23 24
	113.40	12.6	260	1.73		15.2	217	2.07	
	123.50	11.6	284	1.58		13.9	236	1.90	
	139.99	10.2	321	1.40		12.3	268	1.68	
	149.63	9.62	344	1.30		11.5	286	1.56	
	173.32	8.30	398	1.13		9.97	332	1.35	
	185.25	7.77	426	1.06		9.32	355	1.27	
	210.00	6.85	483	*0.93		8.2	402	1.12	
	260.00	5.54	625	0.8		6.6	500	*0.92	

SE - 齒輪減速機 馬力選擇表
SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
71C4 0.55 kw 3/4 HP	4.797	300	16.8	2.97	17/2	360	14.0	>3.00	17 18
	5.979	240	21.0	2.52		288	17.5	>3.00	
	7.103	200	24.9	2.20		240	20.8	2.65	
	8.001	180	28.0	2.50		216	23.3	3.00	
	9.080	158	31.8	2.35		326	26.5	2.83	
	9.929	145	34.8	2.21		174	29.0	2.65	
	12.86	112	45.0	1.82		134	37.5	2.18	
	15.08	95.5	52.8	1.60		114	44.0	1.92	
	17.98	80.0	63.0	1.35		96.0	52.5	1.62	
	19.79	72.7	69.3	1.22		87.2	57.8	1.46	
	24.50	58.7	85.8	1.00		70.4	71.5	1.20	
	21.00	68.5	73.5	2.72	37/2	82.2	61.3	>3.00	19 20
	26.00	55.3	91.0	2.19		66.4	75.8	2.63	
	29.33	49.0	103	1.94		58.9	86.0	2.32	
	32.67	44.0	114	1.75		52.8	95.4	2.10	
	40.44	35.6	142	1.40		42.7	118	1.68	
	45.63	31.5	160	1.25		37.8	133	1.50	
	38.00	37.8	130	1.54	37/3	45.4	109	1.84	
	45.59	31.5	156	1.28		37.8	130	1.54	
	48.85	29.4	167	1.20		35.3	139	1.44	
	53.33	27.0	182	1.10		32.4	152	1.32	
	60.15	23.9	206	1.00		28.7	172	1.20	
	45.59	31.5	156	1.92	47/3	37.8	130	2.30	21 22
	48.85	29.4	167	1.80		35.3	139	2.16	
	53.33	27.0	182	1.64		32.4	152	1.97	
	60.15	23.9	206	1.45		28.7	172	1.74	
	68.53	21.0	234	1.28		25.2	195	1.53	
	75.60	19.0	259	1.15		22.8	216	1.38	
	84.42	17.0	289	1.04		20.4	241	1.25	
	93.60	15.3	320	*0.94		18.4	267	1.13	
	68.53	21.0	234	1.92	57/3	25.2	195	2.30	23 24
	75.60	19.0	259	1.73		22.8	216	2.08	
	84.42	17.0	289	1.55		20.4	241	1.86	
	93.60	15.3	320	1.40		18.4	267	1.68	
	99.75	14.4	342	1.31		17.3	284	1.57	
	102.86	14.0	352	1.27		16.8	294	1.53	
	113.40	12.6	388	1.16		15.2	324	1.40	
	123.50	11.6	423	1.06		13.9	353	1.27	
	139.99	10.2	480	*0.94		12.3	400	1.13	
	149.63	9.62	512	*0.88		11.5	427	1.06	
	135.40	10.6	478	1.80	77/3	12.7	398	2.16	25 26
	149.50	9.63	527	1.61		11.5	439	1.93	
	170.70	8.44	602	1.41		10.1	502	1.69	
	186.20	7.73	657	1.29		9.24	548	1.55	
	215.20	6.69	759	1.12		7.99	633	1.34	
	234.70	6.14	828	1.03		7.33	690	1.24	
	268.00	5.37	945	*0.9		6.42	788	1.08	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
80B4 0.75 kw 1 HP	4.797	300	22.9	2.18	17/2	360	19.0	2.62	17 18
	5.979	240	28.5	1.85		288	23.7	2.23	
	7.103	200	33.9	1.62		240	28.3	1.94	
	8.001	180	38.2	1.83		216	31.8	2.19	
	9.080	158	43.4	1.72		326	36.2	2.07	
	9.929	145	47.4	1.62		174	39.5	1.94	
	12.86	112	61.3	1.38		134	51.2	1.66	
	15.08	95.5	72.0	1.18		114	60.0	1.41	
	17.98	80.0	85.8	*1.00		96.0	71.5	1.20	
	12.66	114	60.4	>3.00	37/2	135	50.4	>3.00	19 20
	16.00	90.0	76.3	2.62		107	63.6	>3.00	
	21.00	68.5	100	2.00		82.2	83.4	2.40	
	26.00	55.3	124	1.61		66.4	104	1.93	
	29.33	49.0	140	1.42		58.9	117	1.71	
	32.67	44.0	156	1.28		52.8	130	1.53	
	40.44	35.6	193	1.03		42.7	160	1.24	
	31.50	45.7	150	2.00	47/2	54.8	125	2.40	21 22
	39.00	36.9	186	1.61		44.3	155	1.93	
	44.00	32.7	210	1.42		39.2	175	1.70	
	45.59	31.5	213	1.40	47/3	37.8	177	1.69	23 24
	48.85	29.4	228	1.31		35.3	190	1.57	
	53.33	27.0	250	1.20		32.4	208	1.44	
	60.15	23.9	280	1.07		28.7	234	1.28	
	68.53	21.0	320	*0.94	57/3	25.2	266	1.12	25 26
	48.85	29.4	228	1.97		35.3	190	2.36	
	53.33	27.0	250	1.80		32.4	208	2.16	
	60.15	23.9	280	1.60		28.7	234	1.92	
	68.53	21.0	320	1.40		25.2	266	1.68	
	75.60	19.0	353	1.27		22.8	294	1.52	
	84.42	17.0	394	1.14		20.4	328	1.37	
	93.60	15.3	437	1.03		18.4	364	1.23	
	99.75	14.4	465	*0.96	77/3	17.3	388	1.16	27 28
	77.30	18.6	355	2.46		22.3	296	2.95	
	85.50	16.8	412	2.06		20.1	343	2.47	
	93.10	15.5	443	1.92		18.5	369	2.30	
	110.90	13.0	530	1.70		15.5	442	2.04	
	122.20	11.8	587	1.48		14.1	489	1.78	
	135.40	10.6	651	1.31		12.7	543	1.57	
	170.80	8.43	821	1.04		10.1	684	1.25	
	194.90	7.39	934	*0.92	87/3	8.83	778	1.10	
	179.10	8.04	861	2.10		9.60	718	2.52	
	195.10	7.38	938	1.92		8.82	782	2.30	
	222.80	6.28	1071	1.68		7.72	893	2.02	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
80C4 1.1 kw 1.5 HP	4.797	300	28.0	1.78	17/2	359	23.3	2.14	17 18
	5.979	241	35.0	1.50		288	29.2	1.80	
	7.103	203	41.6	1.32		242	34.7	1.58	
	8.001	180	46.8	1.49		215	39.0	1.79	
	9.080	159	53.2	1.40		189	44.3	1.69	
	9.929	145	58.2	1.32		173	48.5	1.58	
	12.86	112	75.3	1.08		134	62.8	1.30	
	10.28	140	60.2	2.82	37/2	167	50.2	>3.00	19 20
	12.66	114	74.2	2.56		136	61.8	>3.00	
	16.00	90.0	93.7	2.13		108	78.1	2.56	
	21.00	68.6	123	1.62		81.9	103	1.95	
	26.00	55.4	153	1.30		66.2	128	1.56	
	29.33	49.1	172	1.16		58.6	143	1.39	
	32.67	44.1	192	1.04		52.7	160	1.24	
	29.33	49.1	172	1.74	47/2	58.6	143	2.09	21 22
	31.50	45.7	185	1.62		54.6	154	1.94	
	39.00	36.9	228	1.31		44.1	190	1.57	
	44.00	32.7	257	1.16		39.1	214	1.40	
	39.00	36.9	228	1.97	57/2	44.1	190	2.36	23 24
	44.00	32.7	257	1.75		39.1	214	2.10	
	38.00	37.9	217	2.07	57/3	45.3	181	2.48	
	45.59	31.6	261	1.72		37.7	218	2.58	
	48.85	29.5	286	1.57		35.2	238	1.88	
	53.33	27.0	306	1.47		32.3	255	1.76	
	60.15	23.9	345	1.30		28.6	288	1.56	
	68.53	21.0	393	1.14		25.1	328	1.37	
	75.60	19.0	443	1.04		22.8	369	1.25	
	84.42	17.1	483	*0.93		20.4	403	1.12	
	93.60	15.4	536	*0.84		18.4	447	*1.00	
	99.75	14.4	572	*0.78		17.2	477	*0.95	
	49.50	29.1	300	2.94	77/3	34.7	250	>3.00	25 26
	59.80	24.1	352	2.42		28.8	293	2.90	
	73.70	19.5	435	1.97		23.3	363	2.36	
	85.80	16.8	506	1.70		20.0	422	2.04	
	93.10	15.5	548	1.58		18.5	457	1.90	
	110.90	13.0	653	1.30		15.5	544	1.56	
	122.20	11.8	720	1.18		14.1	600	1.42	
	135.40	10.6	799	1.06		12.7	666	1.27	
	170.70	8.44	1002	*0.86		10.1	835	1.03	
	194.90	7.39	1144	*0.75		8.83	953	*0.9	
	154.80	9.30	913	2.00	87/3	11.1	761	2.40	27 28
	162.30	8.87	958	1.88		10.6	798	2.26	
	179.10	8.04	1057	1.77		9.60	881	2.12	
	195.10	7.38	1151	1.56		8.82	959	1.87	
	222.80	6.46	1314	1.37		7.72	1095	1.64	

SE - 齒輪減速機 馬力選擇表
SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
90L4 1.5 KW 2 HP	5.088	283	49.0	2.75	37/2	338	40.5	>3.00	19 20
	6.344	227	61.0	2.29		271	50.5	2.75	
	8.000	180	76.5	2.09		215	63.7	2.50	
	10.28	140	98.2	1.73		167	81.8	2.07	
	12.66	114	121	1.57		135	101	1.88	
	16.00	90.0	153	1.30		107	128	1.56	
	21.00	68.5	200	1.00		82.2	167	1.20	
	16.00	90.0	153	1.79	47/2	107	128	2.15	21 22
	21.00	68.5	200	1.50		82.2	167	1.80	
	26.00	55.3	248	1.20		66.4	208	1.44	
	29.33	49.0	280	1.07		58.9	234	1.28	
	31.50	45.7	300	*1.00		54.8	250	1.20	
	26.00	55.3	248	1.81	57/2	66.4	208	2.17	23 24
	29.33	49.0	280	1.60		58.9	234	1.92	
	31.50	45.7	300	1.50		54.8	250	1.80	
	39.00	36.9	372	1.20		44.3	310	1.45	
	44.00	32.7	420	1.07		39.2	350	1.28	
	37.02	38.8	350	1.28	57/3	46.6	292	1.54	
	38.00	37.8	355	1.26		45.4	296	1.52	
	45.59	31.5	426	1.05		37.8	355	1.26	
	48.85	29.4	456	1.00		35.3	380	1.20	
	53.33	27.0	498	*0.91		32.4	415	1.08	
	60.15	23.9	562	*0.80		28.7	468	*0.96	
	49.50	29.1	476	1.80	77/3	34.7	397	2.16	25 26
	59.80	24.1	525	1.48		28.8	438	1.78	
	73.70	19.5	654	1.20		23.3	545	1.44	
	85.80	16.8	825	1.03		20.0	688	1.24	
	93.10	15.5	895	*0.95		18.5	746	1.14	
	61.40	23.5	590	2.95	87/3	28.0	492	>3.00	27 28
	71.50	20.1	687	2.64		24.1	573	>3.00	
	77.50	18.6	750	2.55		22.2	625	>3.00	
	92.50	15.6	889	2.03		18.6	741	2.44	
	101.80	14.1	981	1.84		16.9	818	2.21	
	112.80	12.8	1082	1.66		15.2	902	1.99	
	124.40	11.6	1197	1.50		13.8	998	1.80	
	142.20	10.1	1367	1.32		12.1	1139	1.58	
	154.80	9.30	1489	1.21		11.1	1241	1.45	
	162.30	8.87	1561	1.15		10.6	1301	1.38	
	179.10	8.04	1723	1.04		9.60	1436	1.25	
	195.10	7.38	1876	*0.96		8.82	1563	1.15	
	215.50	6.68	2072	1.70	97/3	7.98	1727	2.04	29 30
	242.60	5.94	2333	1.54		7.09	1944	1.85	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
100La4 2.2 KW 3 HP	5.088	283	72.0	2.22	47/2	338	60.0	2.66	21 22
	6.344	227	88.8	1.80		271	74.0	2.16	
	8.000	180	112	1.78		215	93.4	2.14	
	10.28	140	144	1.66		167	120	2.00	
	12.66	114	177	1.41		135	147	1.69	
	16.00	90.0	224	1.23		107	186	1.47	
	21.00	68.5	294	1.02		82.2	245	1.22	
	16.00	90.0	224	1.96	57/2	107	188	2.35	23 24
	21.00	68.5	294	1.53		82.2	245	1.83	
	26.00	55.3	364	1.23		66.4	304	1.48	
	29.33	49.0	410	1.09		58.9	342	1.32	
	31.50	45.7	441	1.02		54.8	367	1.22	
	26.20	55.0	379	2.12	77/2	65.6	316	2.54	25 26
	28.90	49.8	417	1.92		59.5	348	2.30	
	32.00	45.0	461	1.84		53.8	384	2.21	
	40.30	35.7	581	1.46		42.7	484	1.75	
	46.10	31.2	664	1.28	77/3	37.3	553	1.54	27 28
	49.50	29.1	698	1.20		34.7	582	1.44	
	59.80	24.1	843	1.00		28.8	703	1.20	
	73.70	19.5	1030	*0.8	87/3	23.3	858	*0.96	29 30
	49.90	28.9	705	2.26		34.5	588	2.71	
	61.40	23.5	866	1.84		28.0	722	2.21	
	71.50	20.1	1008	1.79		24.1	840	2.15	
	77.70	18.5	1096	1.58		22.1	913	1.90	
	92.50	15.6	1305	1.38		18.6	1088	1.66	
	101.80	14.1	1435	1.25		16.9	1196	1.50	
	112.80	12.8	1591	1.13		15.2	1326	1.36	
	142.20	10.1	2005	*0.9		12.1	1671	1.08	
	143.40	10.0	2023	1.70	97/3	12.0	1686	2.04	31 32
	160.80	8.96	2269	1.54		10.7	1891	1.85	
	181.10	7.95	2554	1.37		9.50	2128	1.64	
	194.20	7.42	2740	1.28		8.86	2283	1.54	
	215.50	6.68	3039	1.15		7.98	2533	1.38	
	242.60	5.94	3422	1.05		7.09	2852	1.26	
	207.40	6.94	2926	1.71	107/3	8.29	2438	2.05	31 32
	230.90	6.24	3258	1.53		7.45	2715	1.84	
	259.60	5.55	3663	1.37		6.63	3053	1.64	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
112M4 4 KW 5.5 HP	5.088	283	130	1.23	47/2	338	155	1.47	21
	6.344	227	161	1.00		271	135	1.20	
	8.000	180	203	1.00		215	170	1.20	22
	10.28	140	262	*0.93		167	218	1.12	
	5.088	283	130	2.34	57/2	338	155	2.81	23
	6.344	227	161	2.06		271	135	2.47	
	8.000	180	203	1.77		215	170	2.12	
	10.28	140	262	1.45		167	218	1.74	
	12.66	114	322	1.27		135	268	1.52	24
	16.00	90.0	406	1.11		107	340	1.33	
	21.00	68.5	534	*0.85	77/2	82.2	445	1.02	25
	11.70	123.1	306	2.28		147.0	255	2.74	
	14.10	102.1	367	1.90		122.0	306	2.28	
	17.40	82.8	455	1.80		98.9	379	2.16	
	20.30	70.9	531	1.60		84.7	443	1.92	26
	22.00	65.5	576	1.47		78.2	480	1.76	
	26.30	54.8	689	1.16		65.4	574	1.39	27
	28.90	49.8	757	1.05		59.5	631	1.26	
	32.00	45.0	838	1.01		53.8	698	1.21	
	34.40	41.9	900	1.80	87/2	50.0	750	2.16	28
	38.70	37.2	1014	1.58		44.4	845	1.90	
	42.80	33.6	1120	1.43		40.2	933	1.72	
	48.10	29.9	1261	1.27		35.8	1051	1.52	29
	41.20	35.0	1057	1.51	87/3	41.7	881	1.81	
	49.90	28.9	1280	1.25		34.5	1067	1.50	
	61.40	23.5	1575	1.14		28.0	1313	1.37	
	71.50	20.1	1833	*0.98		24.1	1528	1.18	
	77.50	18.6	1986	*0.9		22.2	1655	1.08	30
	79.80	18.0	2024	1.70	97/3	21.6	1687	2.04	
	84.20	17.1	2159	1.62		20.4	1799	1.94	
	93.40	15.4	2395	1.46		18.4	1996	1.75	
	100.10	14.4	2567	1.36		17.2	2139	1.63	
	120.80	11.9	3099	1.13		14.2	2583	1.36	
	134.10	10.7	3438	1.02		12.8	2865	1.22	
	143.40	10.0	3678	*0.95		12.0	3065	1.14	
	100.30	14.4	2572	1.94	107/3	17.1	2143	2.33	31
	108.30	13.3	2779	1.80		15.9	2316	2.16	
	118.60	12.1	3042	1.64		14.5	2535	1.97	
	128.20	11.2	3288	1.52		13.4	2740	1.82	
	144.80	9.94	3712	1.35		11.9	3093	1.62	
	155.20	9.28	3981	1.26		11.1	3318	1.51	32
	172.80	8.33	4432	1.13		9.95	3693	1.36	
	189.20	7.61	4853	1.03		9.09	4044	1.24	
	207.40	6.94	5320	*0.94		8.29	4433	1.13	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
132SA4 5.5 kw 7.5 HP	5.40	266.7	194	2.60	77/2	318.5	162	>3.00	25 26
	5.90	244.1	214	2.57		291.5	178	>3.00	
	7.40	194.6	266	2.07		232.4	222	2.48	
	11.7	123.1	421	1.54		147.0	351	1.85	
	14.1	102.1	510	1.36		122.0	425	1.63	
	17.4	82.76	620	1.27		98.85	517	1.52	
	20.3	70.94	730	1.16		84.73	608	1.39	
	22.0	65.45	792	1.06		78.18	660	1.27	
	26.2	54.96	944	*0.90		65.65	787	1.08	
	19.4	74.23	698	2.29	87/2	88.66	582	2.75	27 28
	21.4	67.29	770	2.08		80.37	642	2.50	
	22.8	63.16	821	1.95		75.44	684	2.34	
	26.6	54.14	958	1.67		64.66	798	2.00	
	27.9	51.61	1004	1.59		61.65	837	1.91	
	31.2	46.15	1122	1.43		55.13	935	1.72	
	34.4	41.86	1238	1.29		50.00	1032	1.55	
	38.7	37.21	1394	1.15		44.44	1162	1.38	
	42.8	33.64	1540	1.04		40.19	1283	1.25	
	48.1	29.94	1734	*0.92		35.76	1445	1.10	
	41.3	34.87	1488	2.22	97/2	41.65	1240	2.66	29 30
	45.8	31.44	1650	2.00		37.55	1375	2.40	
	51.5	27.96	1855	1.78		33.40	1546	2.14	
	69.7	20.66	2458	1.40	97/3	24.68	2048	1.68	
	79.8	18.05	2815	1.24		21.55	2346	1.49	
	84.2	17.10	2968	1.18		20.43	2473	1.42	
	93.4	15.42	3293	1.06		18.42	2744	1.27	
	100.1	14.39	3529	*0.99		17.18	2941	1.19	
	83.30	17.29	2939	1.70	107/3	20.65	2449	2.04	31 32
	90.0	16.00	3173	1.58		19.11	2644	1.90	
	100.30	14.36	3537	1.41		17.15	2948	1.69	
	108.3	13.30	3821	1.31		15.88	3184	1.57	
	118.6	12.14	4183	1.20		14.50	3486	1.44	
	128.2	11.23	4520	1.11		13.42	3767	1.33	
	144.8	9.945	5106	*0.98		11.88	4255	1.18	
	115.9	12.42	4088	1.96	137/3	14.84	3407	2.35	33 34
	128.5	11.21	4531	1.77		13.39	3776	2.12	
	139.6	10.32	4922	1.63		12.32	4102	1.96	
	154.3	9.332	5443	1.47		11.15	4536	1.76	
	186.0	7.742	6558	1.22		9.247	5465	1.46	
	206.1	6.987	7268	1.10		8.345	6057	1.32	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
132MA4 7.5 kw 10 HP	5.40	266.67	264	1.90	77/2	318.52	220	2.28	25 26
	5.90	244.07	291	1.89		291.53	243	2.27	
	7.40	194.59	363	1.52		232.43	303	1.82	
	11.70	123.08	574	1.13		147.01	478	1.36	
	14.10	102.13	710	1.02		121.99	592	1.22	
	17.40	82.76	854	*0.85		98.85	712	1.02	
	20.30	70.94	996	*0.75		84.73	830	*0.9	
	7.40	194.59	363	2.20	87/2	232.43	303	2.64	27 28
	8.00	180.00	394	2.03		215.00	328	2.44	
	8.90	161.80	435	2.07		193.26	363	2.48	
	11.00	130.91	541	2.03		156.36	451	2.44	
	13.50	106.67	663	2.11		127.41	553	2.53	
	14.90	96.64	732	2.05		115.44	610	2.46	
	16.60	86.75	816	1.84		103.61	680	2.21	
	18.50	77.84	910	1.65		92.97	758	1.98	
	19.40	74.23	952	1.68		88.66	793	2.02	
	21.40	67.29	1051	1.52		80.37	876	1.82	
	22.80	63.16	1120	1.43		75.44	933	1.72	
	26.60	54.14	1306	1.22		64.66	1088	1.46	
	27.90	51.61	1369	1.17		61.65	1141	1.40	
	31.20	46.15	1530	1.05		55.13	1275	1.26	
	34.40	41.86	1688	*0.95		50.00	1407	1.14	
	34.20	42.11	1680	1.90	97/2	50.29	1400	2.28	29 30
	38.50	37.40	1889	1.48		44.68	1574	1.78	
	41.30	34.87	2028	1.63		41.65	1690	1.96	
	45.80	31.44	2250	1.47		37.55	1875	1.76	
	51.50	27.96	2530	1.30		33.40	2108	1.56	
	55.50	25.95	2668	1.30	97/3	30.99	2223	1.56	31 32
	69.70	20.66	3351	1.04		24.68	2793	1.25	
	79.80	18.05	3838	*0.91		21.55	3198	1.09	
	84.20	17.10	4047	*0.86		20.43	3373	1.03	
	67.30	21.40	3238	1.50	107/3	25.56	2698	1.80	33 34
	73.70	19.54	3545	1.34		23.34	2954	1.61	
	83.30	17.29	4008	1.25		20.65	3340	1.50	
	90.00	16.00	4327	1.16		19.11	3606	1.39	
	100.30	14.36	4823	1.04		17.15	4019	1.25	
	108.60	13.26	5210	*0.96		15.84	4342	1.15	
	118.60	12.14	5705	*0.88		14.50	4754	1.06	
	86.40	16.67	4157	1.90	137/3	19.91	3464	2.28	33 34
	96.20	14.97	4627	1.73		17.88	3856	2.08	
	104.50	13.78	5026	1.59		16.46	4188	1.91	
	115.90	12.42	5575	1.44		14.84	4646	1.73	
	128.50	11.21	6178	1.29		13.39	5148	1.55	
	139.60	10.32	6711	1.19		12.32	5593	1.43	
	154.30	9.33	7422	1.08		11.15	6185	1.30	
	186.00	7.74	8943	1.89		9.25	7453	2.27	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
160M4 11 kw 15 hp	5.40	266.67	388	1.80	87/2	318.52	323	2.16	27 28
	5.90	244.07	428	1.63		291.53	357	1.96	
	7.40	194.59	533	1.50		232.43	444	1.80	
	8.00	180.00	578	1.38		215.00	482	1.66	
	8.90	161.80	638	1.41		193.26	532	1.69	
	11.0	130.91	793	1.39		156.36	661	1.67	
	13.5	106.67	972	1.44		127.41	810	1.73	
	14.9	96.64	1073	1.40		115.44	894	1.68	
	16.6	86.75	1197	1.25		103.61	998	1.50	
	18.5	77.84	1334	1.12		92.97	1112	1.34	
	19.4	74.23	1396	1.15		88.66	1163	1.38	
	21.4	67.29	1541	1.04		80.37	1284	1.25	
	17.9	80.45	1286	2.50	97/2	96.09	1072	>3.00	29 30
	19.8	72.73	1430	2.24		86.87	1192	2.69	
	21.4	67.29	1545	2.07		80.37	1288	2.48	
	24.0	60.00	1727	1.91		71.67	1439	2.29	
	25.9	55.60	1865	1.77		66.41	1554	2.12	
	28.7	50.17	2069	1.59		59.93	1724	1.91	
	30.7	46.91	2213	1.45		56.03	1844	1.74	
	34.2	42.11	2464	1.30		50.29	2053	1.56	
	41.3	34.87	2975	1.11		41.65	2479	1.33	
	45.8	31.44	3300	1.00		37.55	2750	1.20	
	33.0	43.64	2377	2.10	107/2	52.12	1981	2.52	31 32
	36.1	39.89	2603	1.92		47.65	2169	2.30	
	44.1	32.65	3177	1.57		39.00	2648	1.88	
	55.9	25.76	3941	1.27	107/3	30.77	3284	1.52	
	67.3	21.40	4749	1.06		25.56	3958	1.27	
	73.7	19.54	5199	*0.96		23.34	4333	1.15	
	53.5	26.92	3775	2.10	137/3	32.15	3146	2.52	33 34
	59.2	24.32	4177	1.92		29.05	3481	2.30	
	63.0	22.86	4443	1.80		27.30	3703	2.16	
	71.4	20.17	5033	1.59		24.09	4194	1.91	
	79.1	18.20	5577	1.43		21.74	4648	1.72	
	86.4	16.67	6096	1.31		19.91	5080	1.57	
	96.2	14.97	6786	1.18		17.88	5655	1.42	
	104.5	13.78	7371	1.09		16.46	6143	1.31	
	115.9	12.42	8176	1.90		14.84	6813	2.28	
	128.5	11.21	9061	*0.88		13.39	7551	1.06	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
160L4 15 kw 20 HP	5.40	266.67	529	1.30	87/2	318.52	441	1.56	27 28
	5.90	244.07	584	1.20		291.53	487	1.44	
	7.40	194.59	726	1.10		232.43	605	1.32	
	8.00	180.00	788	1.02		215.00	657	1.22	
	8.90	161.80	869	1.04		193.26	724	1.25	
	11.00	130.91	1081	1.02		156.36	901	1.22	
	13.50	106.67	1326	1.06		127.41	1105	1.27	
	14.90	96.64	1463	1.03		115.44	1219	1.24	
	5.30	271.70	517	>3.00	97/2	324.53	431	>3.00	29 30
	6.40	225.00	624	>3.00		268.75	520	>3.00	
	7.10	202.82	693	>3.00		242.25	578	>3.00	
	8.30	173.49	813	>3.00		207.23	678	>3.00	
	10.00	144.00	981	2.85		172.00	818	>3.00	
	11.10	129.73	1089	2.76		154.95	908	>3.00	
	13.30	108.27	1309	2.37		129.32	1091	2.84	
	16.10	89.44	1581	2.02		106.83	1318	2.42	
	17.90	80.45	1754	1.82		96.09	1462	2.18	
	19.80	72.73	1950	1.64		86.87	1625	1.97	
	21.40	67.29	2106	1.52		80.37	1755	1.82	
	24.00	60.00	2354	1.40		71.67	1962	1.68	
	25.90	55.60	2544	1.30		66.41	2120	1.56	
	28.70	50.17	2822	1.17		59.93	2352	1.40	
	30.70	46.91	3018	1.06		56.03	2515	1.27	
	34.20	42.11	3359	*0.95		50.29	2799	1.14	
	24.50	58.78	2403	2.08	107/2	70.20	2003	2.50	31 32
	27.50	52.36	2700	1.85		62.55	2250	2.22	
	29.90	48.16	2933	1.70		57.53	2444	2.04	
	33.00	43.64	3242	1.54		52.12	2702	1.85	
	36.10	39.89	3549	1.41		47.65	2958	1.69	
	44.10	32.65	4332	1.15		39.00	3610	1.38	
	48.30	29.81	4650	1.70	137/3	35.61	3875	2.04	33 34
	53.50	26.92	5148	1.55		32.15	4290	1.86	
	59.20	24.32	5696	1.40		29.05	4747	1.68	
	63.00	22.86	6059	1.32		27.30	5049	1.58	
	71.40	20.17	6863	1.17		24.09	5719	1.40	
	79.10	18.20	7606	1.05		21.74	6338	1.26	
	86.40	16.67	8313	*0.96		19.91	6928	1.15	
	96.20	14.97	9253	*0.86		17.88	7711	1.03	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
180M4 18.5kw 25 HP	5.30	271.70	638	2.80	97/2	324.53	532	>3.00	29 30
	6.40	225.00	770	2.60		268.75	642	>3.00	
	7.10	202.82	854	2.69		242.25	712	>3.00	
	8.30	173.49	1002	2.49		207.23	835	2.99	
	10.0	144.00	1211	2.31		172.00	1009	2.77	
	11.0	130.91	1343	2.23		156.36	1119	2.68	
	13.3	108.27	1614	1.92		129.32	1345	2.30	
	16.1	89.44	1949	1.64		106.83	1624	1.97	
	17.9	80.45	2163	1.48		96.09	1803	1.78	
	19.8	72.73	2405	1.33		86.87	2004	1.60	
	21.4	67.29	3598	1.23		80.37	2998	1.48	
	24.0	60.00	2904	1.14		71.67	2420	1.37	
	25.9	55.60	3137	1.05		66.41	2614	1.26	
	28.7	50.17	3480	*0.95		59.93	2900	1.14	
	5.30	271.70	639	>3.00	107/2	324.53	533	>3.00	31 32
	5.80	248.28	700	>3.00		296.55	583	>3.00	
	7.00	205.71	854	>3.00		245.71	712	>3.00	
	7.70	187.01	938	>3.00		223.38	782	>3.00	
	8.50	169.41	1027	>3.00		202.35	856	>3.00	
	10.3	139.81	1253	>3.00		166.99	1044	>3.00	
	12.7	113.39	1534	2.87		135.43	1278	>3.00	
	13.9	103.60	1680	2.74		123.74	1400	>3.00	
	16.9	85.21	2050	2.34		101.78	1708	2.81	
	19.3	74.61	2341	2.14		89.12	1951	2.57	
	20.6	69.90	2492	2.01		83.50	2077	2.41	
	22.5	64.00	2729	1.83		76.44	2274	2.20	
	24.5	58.78	2964	1.69		70.20	2470	2.03	
	27.5	52.36	3330	1.50		62.55	2775	1.80	
	29.9	48.16	3618	1.38		57.53	3015	1.66	
	33.0	43.64	3998	1.25		52.12	3332	1.50	
	36.1	39.89	4337	1.14		47.65	3614	1.37	
	44.1	32.65	5343	*0.94		39.00	4453	1.13	
	32.2	44.72	3906	2.00	137/2	53.42	3255	2.40	33 34
	38.9	37.02	4707	1.70		44.22	3923	2.04	
	43.1	33.41	5216	1.53	137/3	39.91	4347	1.84	
	48.3	29.81	5735	1.40		35.61	4779	1.68	
	53.5	26.92	6350	1.26		32.15	5292	1.51	
	59.2	24.32	7025	1.14		29.05	5854	1.37	
	63.0	22.86	7472	1.07		27.30	6227	1.28	
	71.4	20.17	8464	*0.95		24.09	7053	1.14	
	79.1	18.20	9380	*0.85		21.74	7817	1.02	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table







馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
180L4 22 kw 30 HP	5.30	271.70	758	2.40	97/2	324.53	632	2.88	29 30
	6.40	225.00	916	2.18		268.75	763	2.62	
	7.10	202.82	1016	2.26		242.25	847	2.71	
	8.30	173.49	1192	2.10		207.23	993	2.52	
	10.0	144.00	1440	1.95		172.00	1200	2.34	
	11.1	129.73	1597	1.88		154.95	1331	2.26	
	13.3	108.27	1920	1.61		129.32	1600	1.93	
	16.1	89.44	2318	1.38		106.83	1932	1.66	
	17.9	80.45	2572	1.24		96.09	2143	1.49	
	19.8	72.73	2860	1.12		86.87	2383	1.34	
	21.4	67.29	3089	1.04		80.37	2574	1.25	
	24.0	60.00	3453	*0.96		71.67	2878	1.15	
	25.9	55.60	3731	*0.88		66.41	3109	1.06	
	5.30	271.70	760	>3.00	107/2	324.53	633	>3.00	31 32
	5.80	248.28	832	>3.00		296.55	693	>3.00	
	7.00	205.71	1016	>3.00		245.71	847	>3.00	
	7.70	187.01	1115	>3.00		223.38	929	>3.00	
	8.50	169.41	1221	>3.00		202.35	1018	>3.00	
	10.3	139.81	1491	2.68		166.99	1243	>3.00	
	12.7	113.39	1824	2.41		135.43	1520	2.89	
	13.9	103.60	1997	2.30		123.74	1664	2.76	
	16.9	85.21	2438	1.97		101.78	2032	2.36	
	19.3	74.61	2784	1.80		89.12	2320	2.16	
	20.6	69.90	2964	1.69		83.50	2470	2.03	
	22.5	64.00	3245	1.54		76.44	2704	1.85	
	24.5	58.78	3525	1.42		70.20	2938	1.70	
	27.5	52.36	3961	1.26		62.55	3301	1.51	
	29.9	48.16	4302	1.16		57.53	3585	1.39	
	33.0	43.64	4754	1.05		52.12	3962	1.26	
	36.1	39.89	5205	*0.96		47.65	4338	1.15	
	24.2	59.50	3479	2.30	137/2	71.07	2899	2.76	33 34
	26.8	53.73	3856	2.07		64.18	3213	2.48	
	32.2	44.72	4645	1.72		53.42	3871	2.06	
	38.9	37.02	5597	1.43		44.22	4664	1.72	
	43.1	33.41	6203	1.29		39.91	5169	1.55	
	48.3	29.81	6820	1.20	137/3	35.61	5683	1.44	
	53.5	26.92	7551	1.06		32.15	6293	1.27	
	59.2	24.32	8354	*0.96		29.05	6962	1.15	
	63.0	22.86	8886	*0.90		27.30	7405	1.08	

SE - 齒輪減速機 馬力選擇表

SE - Horse Power Selection Table

馬達	減速比	50 HZ / 1440 rpm			TYPE	60 HZ / 1720 rpm			Pag
		輸出轉速	輸出扭力	S.F		輸出轉速	輸出扭力	S.F	
200L4 30 kw 40 HP	5.30	271.70	1036	2.90	107/2	324.53	863	>3.00	31 32
	5.80	248.28	1135	2.82		296.55	946	>3.00	
	7.00	205.71	1385	2.60		245.71	1154	>3.00	
	7.70	187.01	1521	2.43		223.38	1268	2.92	
	8.50	169.41	1665	2.28		202.35	1388	2.74	
	10.3	139.81	2033	1.97		166.99	1694	2.36	
	12.7	113.39	2488	1.77		135.43	2073	2.12	
	13.9	103.60	2724	1.69		123.74	2270	2.03	
	16.9	85.21	3324	1.44		101.78	2770	1.73	
	19.3	74.61	3796	1.32		89.12	3163	1.58	
	20.6	69.90	4041	1.24		83.50	3368	1.49	
	22.5	64.00	4425	1.13		76.44	3688	1.36	
	27.5	52.36	5401	*0.93		62.55	4501	1.12	
	17.5	82.29	3429	2.30	137/2	98.29	2858	2.76	33 34
	20.0	72.00	3838	2.03		86.00	3198	2.44	
	24.2	59.50	4744	1.69		71.07	3953	2.03	
	26.8	53.73	5258	1.52		64.18	4382	1.82	
	32.2	44.72	6334	1.26		53.42	5278	1.51	
	38.9	37.02	7632	1.05		44.22	6360	1.26	
	43.1	33.41	8558	*0.95		39.91	7132	1.14	
	5.30	271.70	1278	>3.00	137/2	324.53	1065	>3.00	33 34
225S4 37 kw 50 HP	6.40	225.00	1540	>3.00		268.75	1283	>3.00	
	7.00	205.71	1707	2.93		245.71	1423	>3.00	
	7.80	184.62	1900	2.79		220.51	1583	>3.00	
	9.50	151.58	2290	2.84		181.05	1908	>3.00	
	10.5	137.14	2538	2.84		163.81	2115	>3.00	
	13.1	109.92	3167	2.30		131.30	2639	2.76	
	15.8	91.14	3816	2.04		108.86	3180	2.45	
	17.5	82.29	4229	1.87		98.29	3524	2.24	
	20.0	72.00	4856	1.65		86.00	4047	1.98	
	24.2	59.50	5851	1.37		71.07	4876	1.64	
	26.8	53.73	6485	1.23		64.18	5404	1.48	
	32.2	44.72	7812	1.02		53.42	6510	1.22	
	38.9	37.02	9413	*0.85		44.22	7844	1.02	
225M4 45 kg 60 HP	5.30	271.70	1554	>3.00	137/2	324.53	1295	>3.00	33 34
	6.40	225.00	1873	2.62		268.75	1561	>3.00	
	7.00	205.71	2075	2.41		245.71	1729	2.89	
	7.80	184.62	2311	2.29		220.51	1926	2.75	
	9.50	151.58	2785	2.33		181.05	2321	2.80	
	10.5	137.14	3086	2.33		163.81	2572	2.80	
	13.1	109.92	3852	1.90		131.30	3210	2.28	
	15.8	91.14	4641	1.68		108.86	3868	2.02	
	17.5	82.29	5144	1.54		98.29	4287	1.85	
	20.0	72.00	5906	1.35		86.00	4922	1.62	
	24.2	59.50	7117	1.12		71.07	5931	1.34	
	26.8	53.73	7887	1.01		64.18	6573	1.21	

[SE 17] Dimensions 尺寸圖

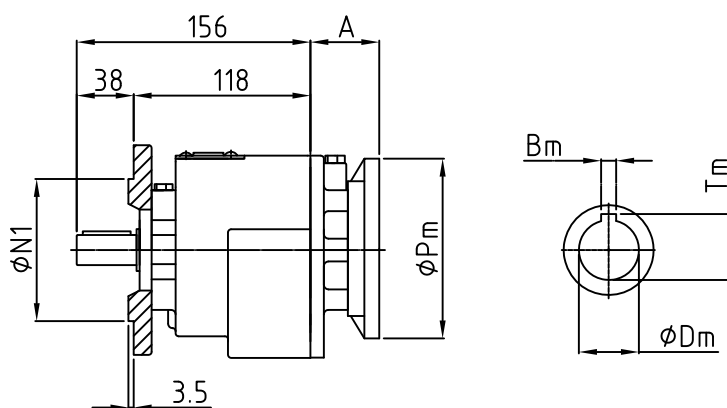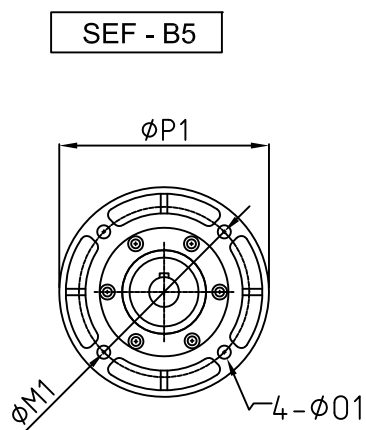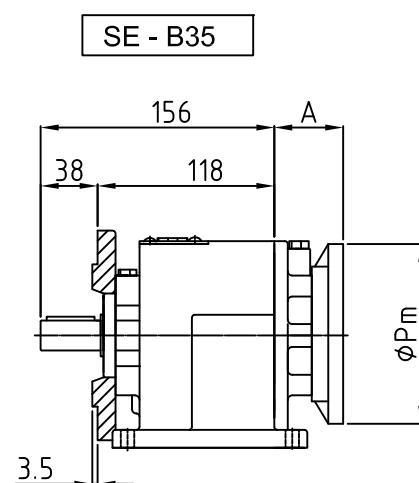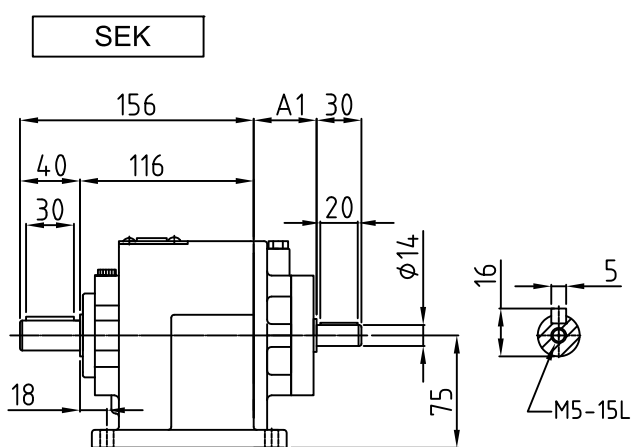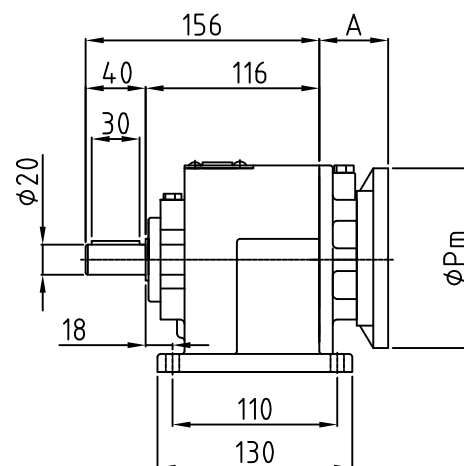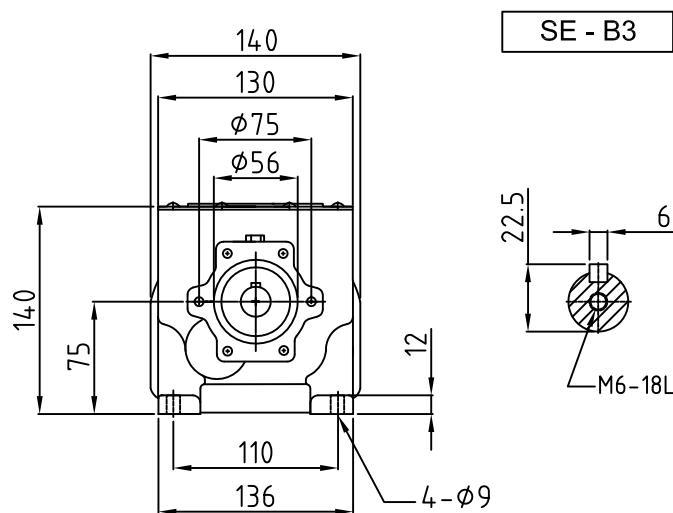

尺寸圖 / Dimensions

TYPE	A			A1			Input Flange				Output Flange				
	17/2	17/3	KG	17/2	17/3	KG	Pm	Dm	Bm	Tm	TYPE	P1	M1	N1	O1
17 / 2-3							140/95	11	4	12.8	FA	140	115	95	9
							160/105	14	5	16.3	FB	160	130	110	9
							200/120	19	6	21.8	FC	200	165	130	11
							B5/B14								




For the dimensions concerning the motor connection area(Pm,Dm,Bm,Tm)please refer to the table shown at page 35.

減速機與馬達的連結尺寸(Pm,Dm,Bm,Tm)請參考 35 頁.


[SE 37] Dimensions 尺寸圖




SE - B3

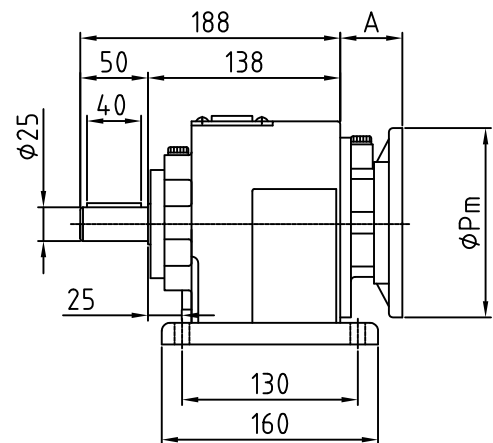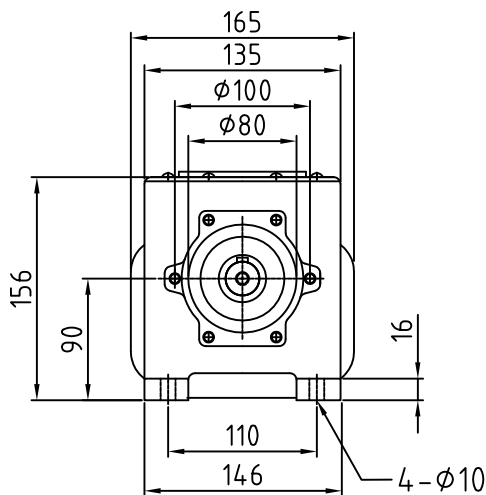




SEK

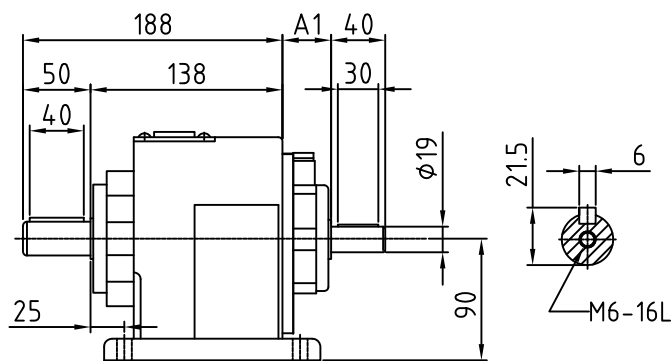

SE - B35

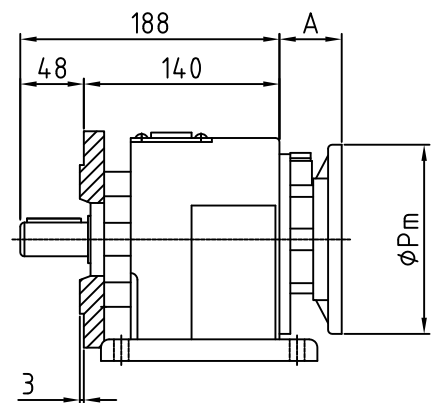

SEF - B5

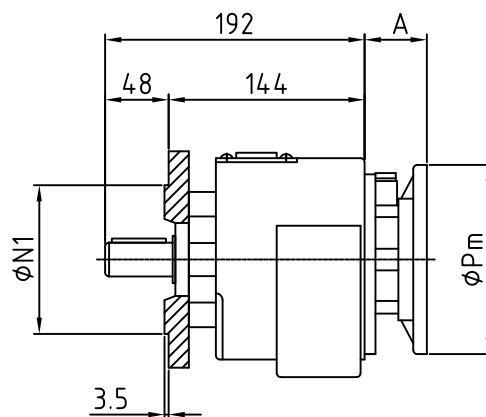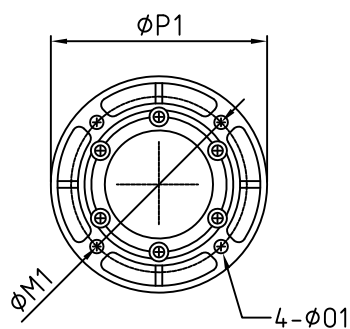

尺寸圖 / Dimensions


TYPE	A			A1			Input Flange				Output Flange					
37 / 2-3	37/2	37/3	KG	37/2	37/3	KG	Pm	Dm	Bm	Tm	TYPE	P1	M1	N1	O1	KG
	46	62	7.6	42	55	7.7	140/95	11	4	12.8	FA	140	115	95	9	0.25
							160/105	14	5	16.3	FB	160	130	110	11	0.6
							200/120	19	6	21.8	FC	200	165	130	11	1
	62	---		55	---		200/140	24	8	27.3	FD	250	215	180	14	1.5
							B5/B14									

For the dimensions concerning the motor connection area(Pm,Dm,Bm,Tm)please refer to the table shown at page 35.


減速機與馬達的連結尺寸(Pm,Dm,Bm,Tm)請參考 35 頁.

[SE 47] Dimensions 尺寸圖


SE - B3

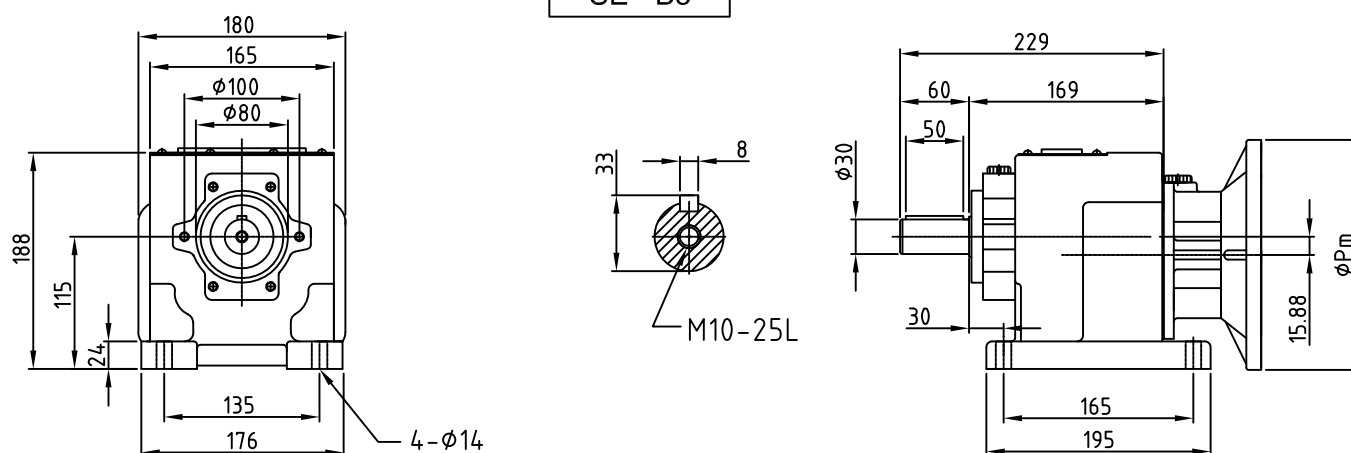


SEK

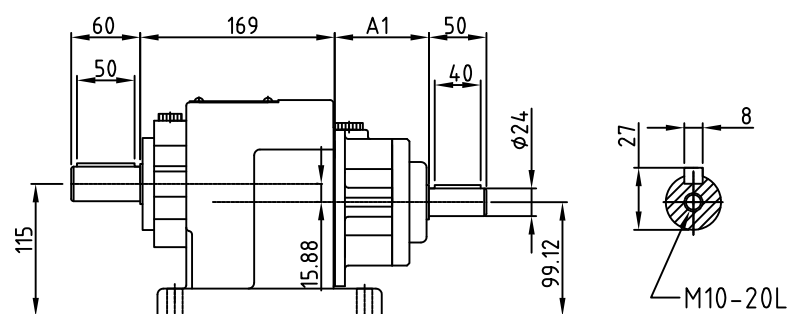

SE - B35

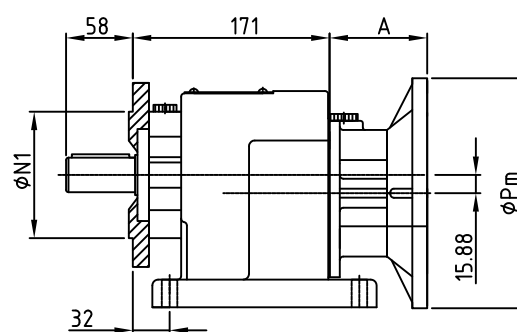

SEF - B5

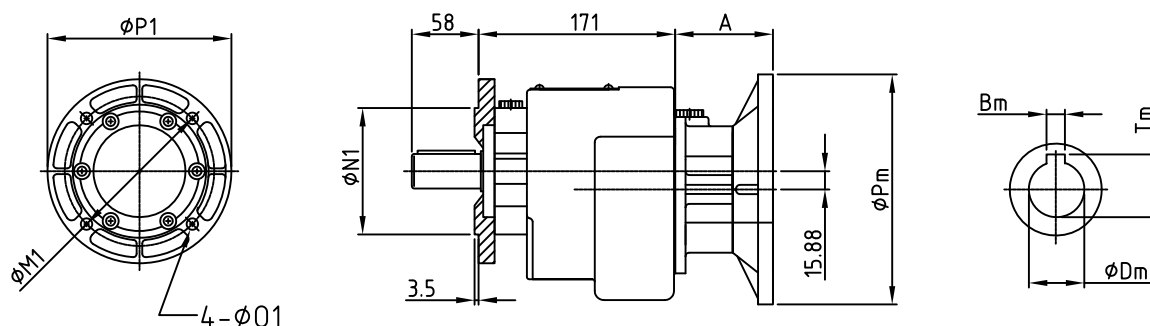

尺寸圖 / Dimensions


TYPE	A			A1			Input Flange				Output Flange					
47 / 2-3	47/2	47/3	KG	47/2	47/3	KG	Pm	Dm	Bm	Tm	TYPE	P1	M1	N1	O1	KG
	46	62	13	42/60	55	13.2	160/105	14	5	16.3	FA	140	115	95	9	0.25
							200/120	19	6	21.8	FB	160	130	110	11	0.6
	75						200/140	24	8	27.3	FC	200	165	130	11	1
							250/160	28	8	31.3	FD	250	215	180	14	1.5
							B5/B14									

For the dimensions concerning the motor connection area(Pm,Dm,Bm,Tm)please refer to the table shown at page 35.


減速機與馬達的連結尺寸(Pm,Dm,Bm,Tm)請參考 35 頁。

[SE 57] Dimensions 尺寸圖


SE - B3

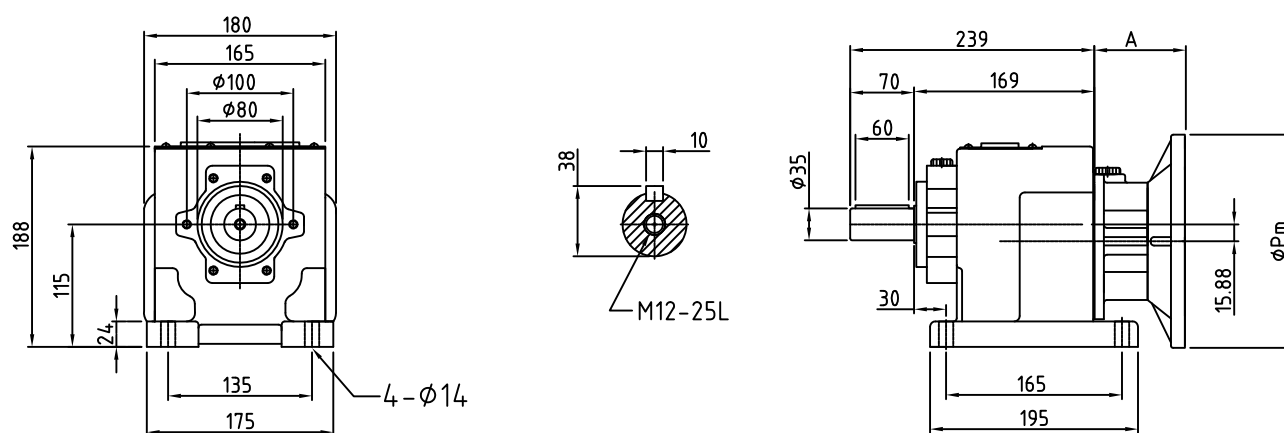


SEK

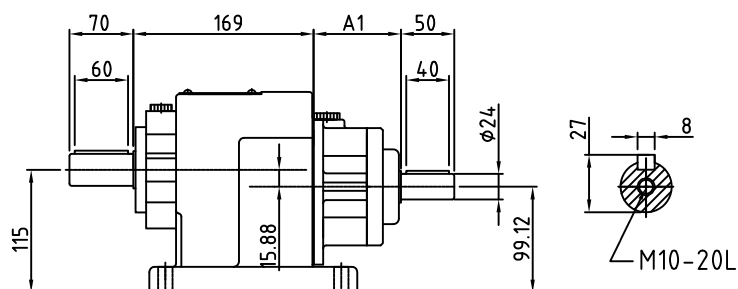

SE - B35

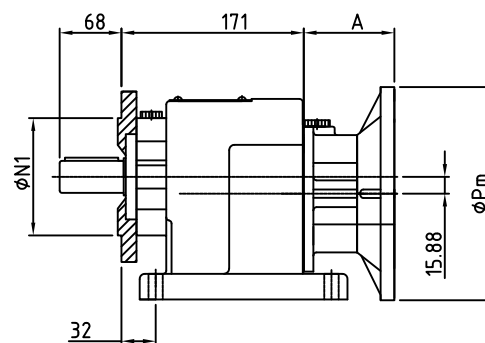

SEF - B5

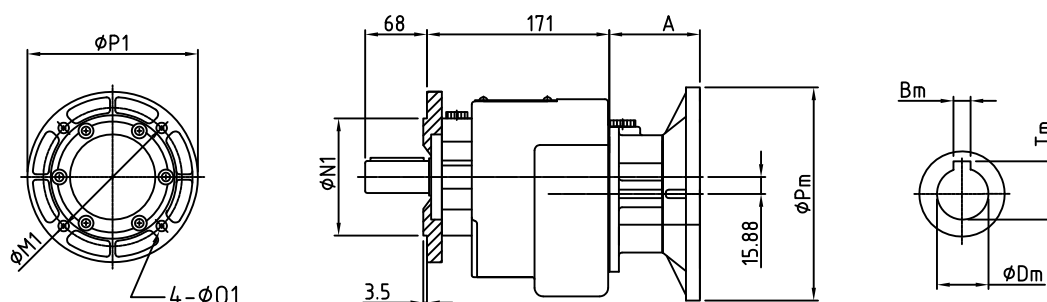



尺寸圖 / Dimensions

TYPE	A			A1			Input Flange				Output Flange					
57 / 2-3	57/2	57/3	KG	57/2	57/3	KG	Pm	Dm	Bm	Tm	TYPE	P1	M1	N1	O1	KG
	46	62	13.2	42/60	55	13.5	160/105	14	5	16.3	FA	140	115	95	9	0.25
							200/120	19	6	21.8	FB	160	130	110	11	0.6
	75						200/140	24	8	27.3	FC	200	165	130	11	1
							250/160	28	8	31.3	FD	250	215	180	14	1.5
							B5/B14									




For the dimensions concerning the motor connection area(Pm,Dm,Bm,Tm)please refer to the table shown at page 35.

減速機與馬達的連結尺寸(Pm,Dm,Bm,Tm)請參考 35 頁。

SE 17/2 * SE 17/3

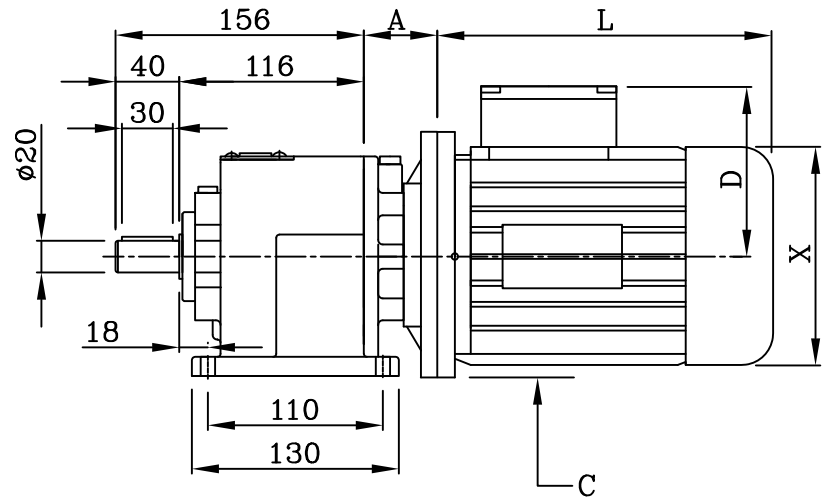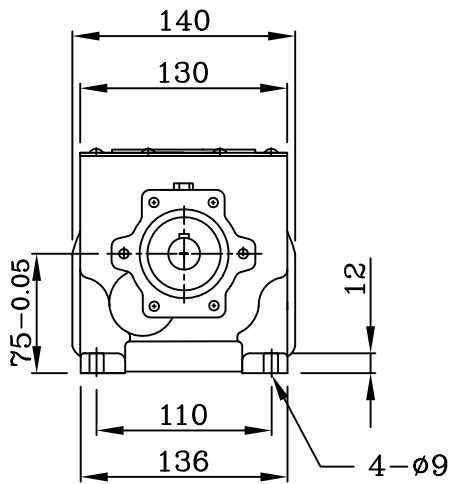

SEF 17/2 * SEF 17/3

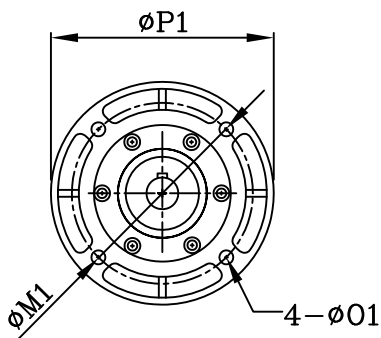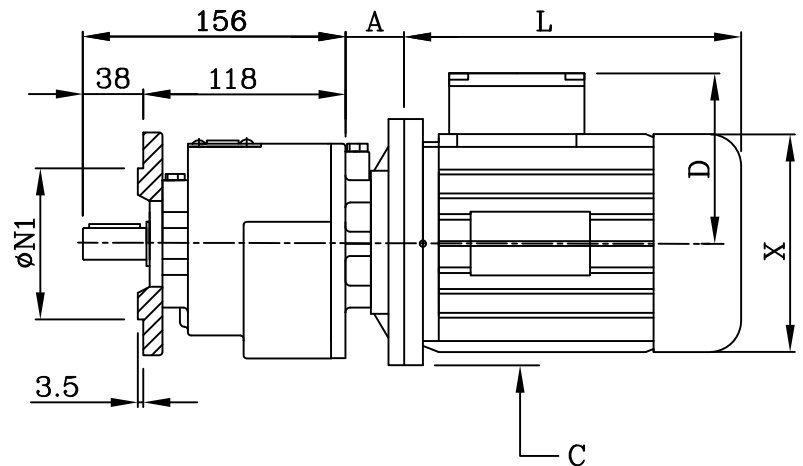

出力法蘭 / Output flange					
TYPE	P1	M1	N1	O1	KG
FA	140	115	95	9	0.25
FB	160	130	110	9	0.6
FC	200	165	130	11	1

Standard : FB Flange



馬達尺寸圖 / Motors Dimensions

A			Motor Pam	C	Standard motors				Barke motors				Inverter motors				Explosion Proof motors			
17/2	17/3	KG		B5/B14	L	X	D	KG	L	X	D	KG	L	X	D	KG	L	X	D	KG
48	50	5.5	MAA63	140/90	194	122	110	4.3	194	122	110	5	194	122	110	4.6	---	---	---	---
			MAA71	160/105	228	137	117	6.2	228	137	117	7.2	228	137	117	6.5	236	125	175	17.3
			MAA80	200/120	251	158	137	10	251	158	137	13	251	158	137	10.3	259	182	185	22.8




For the dimensions concerning the motor connection area(Pm,Dm,Bm,Tm)please refer to the table shown at page 35.

減速機與馬達的連結尺寸(Pm,Dm,Bm,Tm)請參考 35 頁.

SE 37/2 * SE 37/3

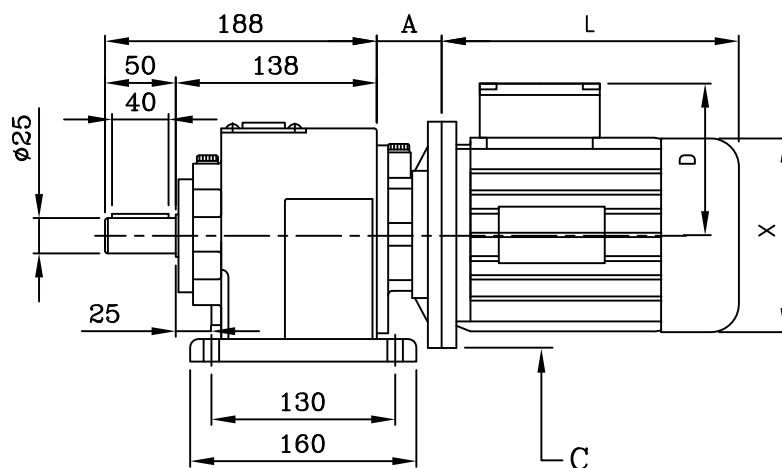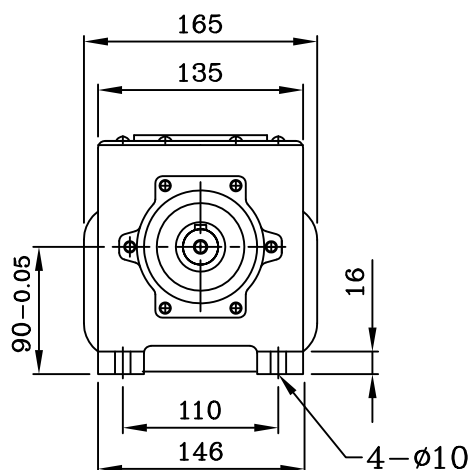

SEF 37/2 * SEF 37/3

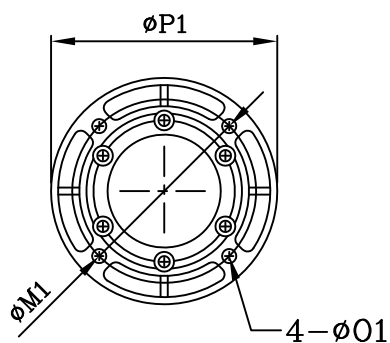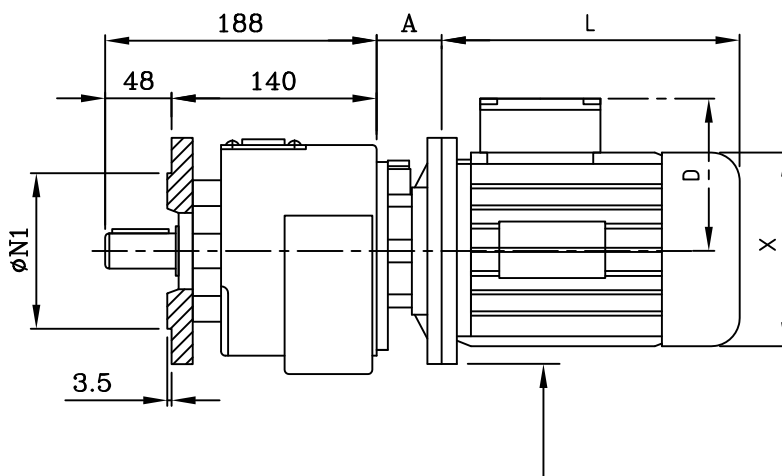

出力法蘭 / Output flange					
TYPE	P1	M1	N1	O1	KG
FA	140	115	95	9	0.25
FB	160	130	110	11	0.6
FC	200	165	130	11	1
FD	250	215	180	14	1.5


Standard : FB Flange

馬達尺寸圖 / Motors Dimensions

A			Motor Pam	C	Standard motors				Barke motors				Inverter motors				Explosion Proof motors			
37/2	37/3	KG		B5/B14	L	X	D	KG	L	X	D	KG	L	X	D	KG	L	X	D	KG
46	62	7.6	MAA63	140/90	192	122	110	4.3	192	122	110	5	194	122	110	4.6	---	---	---	---
			MAA71	160/105	224	137	117	6.2	224	137	117	7.2	228	137	117	6.5	236	125	175	17.3
			MAA80	200/120	250	158	137	10	250	158	137	13	251	158	137	10.3	259	182	185	22.8
62	---	---	MAA90	200/140	315	177	145	14.6	315	177	145	18.1	285	177	145	14.9	304	182	192	31.8

For the dimensions concerning the motor connection area(Pm,Dm,Bm,Tm)please refer to the table shown at page 35.

減速機與馬達的連結尺寸(Pm,Dm,Bm,Tm)請參考 35 頁。




TYPE	P1	M1	N1	O1	KG
FA	140	115	95	9	0.25
FB	160	130	110	11	0.6
FC	200	165	130	11	1
FD	250	215	180	14	1.5



馬達尺寸圖 / Motors Dimensions

A			Motor Pam	C	Standard motors				Barke motors				Inverter motors				Explosion Proof motors			
47/2	47/3	KG		B5/B14	L	X	D	KG	L	X	D	KG	L	X	D	KG	L	X	D	KG
46	62	13	MAA63	140/90	194	122	110	4.3	194	122	110	5	194	122	110	4.6	---	---	---	---
			MAA71	160/105	228	137	117	6.2	228	137	117	7.2	228	137	117	6.5	236	125	175	17.3
			MAA80	200/120	251	158	137	10	251	158	137	13	251	158	137	10.3	259	182	185	22.8
MAA90			200/140	285	177	145	14.6	285	177	145	18.1	285	177	145	14.9	304	182	192	31.8	
75			MAA100	250/160	308	197	152	21	308	197	152	25.1	308	197	152	21.8	337	212	214	46.8
			MAA112	250/160	331	197	180	30.5	331	197	180	37	331	197	180	31.3	377	212	214	59.3

減速機與馬達的連結尺寸(Pm,Dm,Bm,Tm)請參考 35 頁.

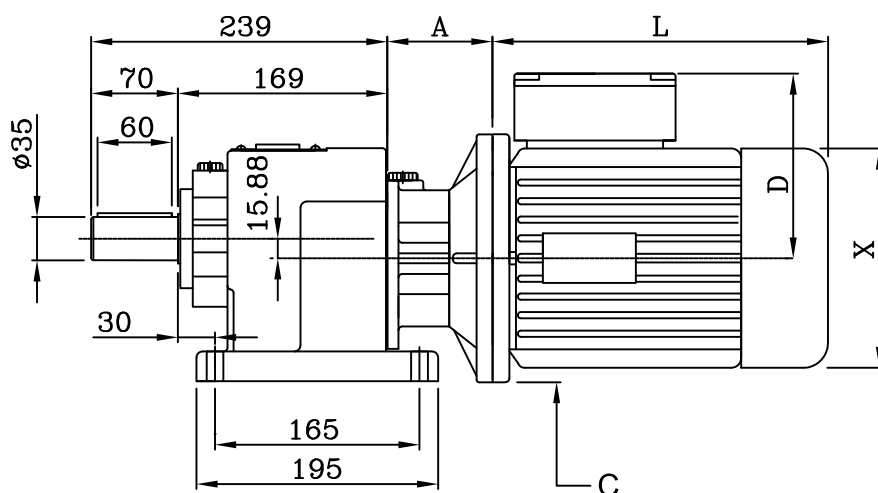

Technical drawing of a bolt head and nut assembly. The bolt head is circular with a diameter of 10 mm. The nut is a hexagonal nut with a height of 38 mm. The bolt is labeled M12-30L.

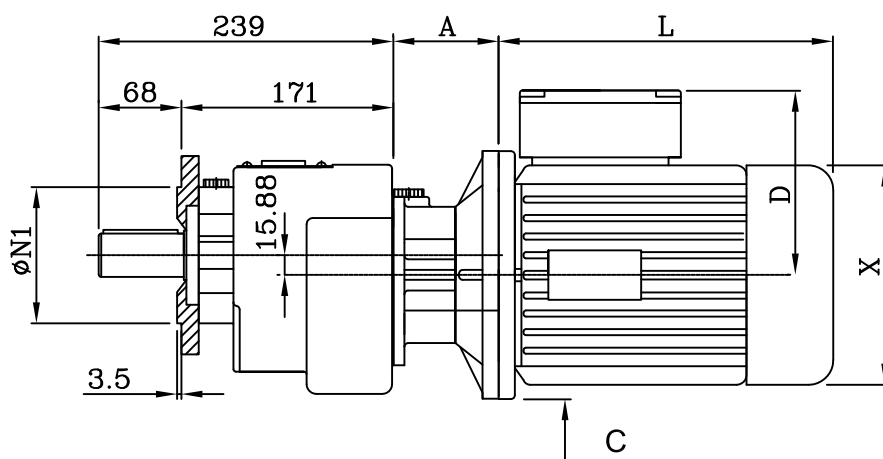

出力法蘭 / Output flange					
TYPE	P1	M1	N1	O1	KG
FA	140	115	95	9	0.25
FB	160	130	110	11	0.6
FC	200	165	130	11	1
FD	250	215	180	14	1.5







馬達尺寸圖 / Motors Dimensions

A			Motor Pam	C	Standard motors				Barke motors				Inverter motors				Explosion Proof motors			
57/2	57/3	KG		B5/B14	L	X	D	KG	L	X	D	KG	L	X	D	KG	L	X	D	KG
46	62	13.2	MAA71	160/105	228	137	117	6.2	228	137	117	7.2	228	137	117	6.5	236	125	175	17.3
			MAA80	200/120	251	158	137	10	251	158	137	13	251	158	137	10.3	259	182	185	22.8
MAA90			200/140	285	177	145	14.6	285	177	145	18.1	285	177	145	14.9	304	182	192	31.8	
MAA100			250/160	308	197	152	21	308	197	152	25.1	308	197	152	21.8	337	212	214	46.8	
MAA112			250/160	331	197	180	30.5	331	197	180	37	331	197	180	31.3	377	212	214	59.3	
75																				

For the dimensions concerning the motor connection area(Pm,Dm,Bm,Tm)please refer to the table shown at page 35.

減速機與馬達的連結尺寸(Pm,Dm,Bm,Tm)請參考 35 頁.

【 SE 77 】 Dimensions 尺寸圖

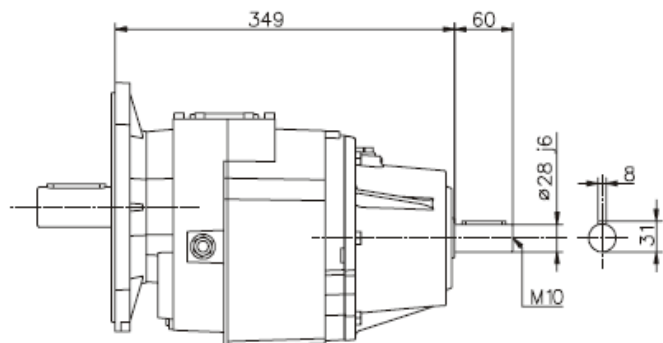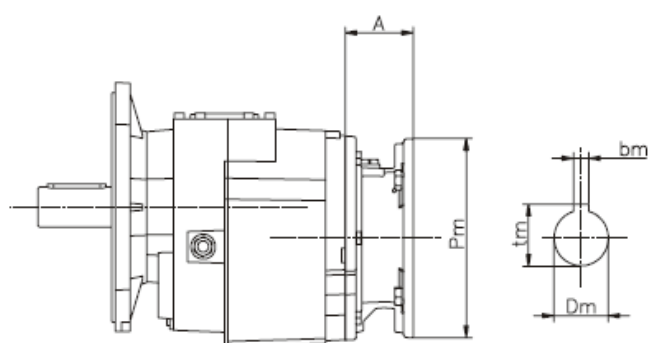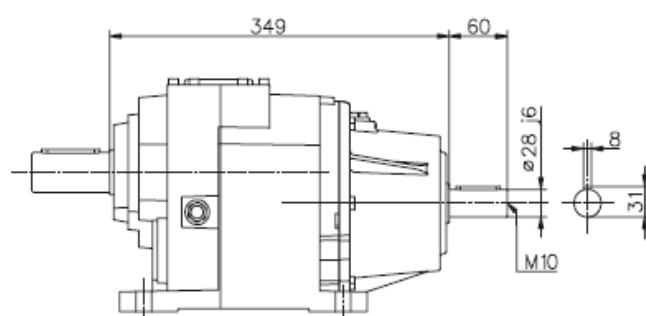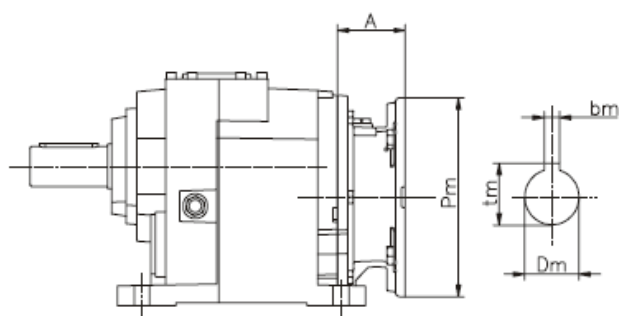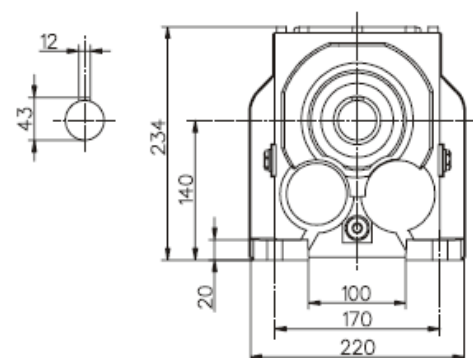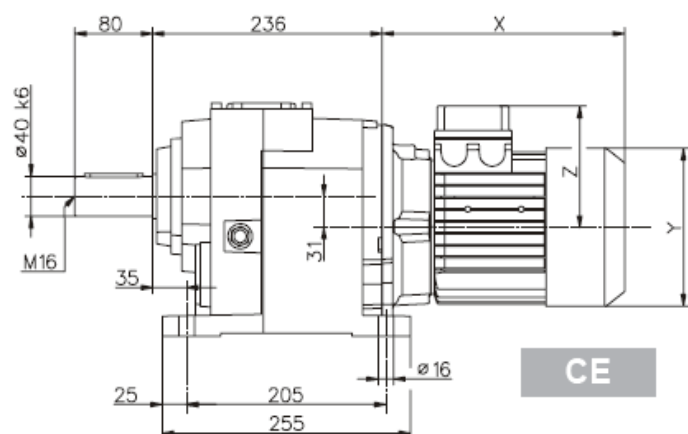





SEF

SEFK






060	IH	PAM		標準馬達 Moteur normal / Motor normal				剎車馬達 Moteur frein / Motor-freno			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
71	35,2	49	29,1	221	139	112	32,7	285	139	128	34,9
80		70	31,2	248	158	122	37,8	321	158	137	41,3
90s		70	31,2	276	173	130	40,2	353	173	130	45,7
90l		70	31,2	301	173	130	41,7	378	173	130	47,2
100		85	33,3	335	191	139	46,8	417	191	139	52,3
112		85	33,3	356	211	154	58,2	453	211	154	67,9
132s		110	36	396	249	194	72,2	495	249	194	82,5
132m		110	36	443	249	194	83,8	547	249	194	98,5

For the dimensions concerning the motor connection area (Pm,Dm,bm,tm) please refer to the table shown at page 35 .
減速機與馬達的連結尺寸(Pm,Dm,bm,tm)請參考 35 頁.

【 SE 77 】 Dimensions 尺寸圖

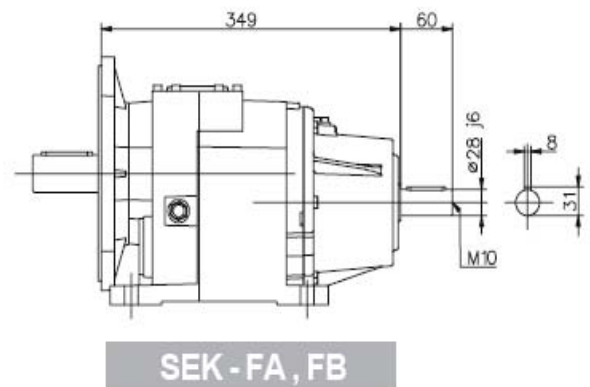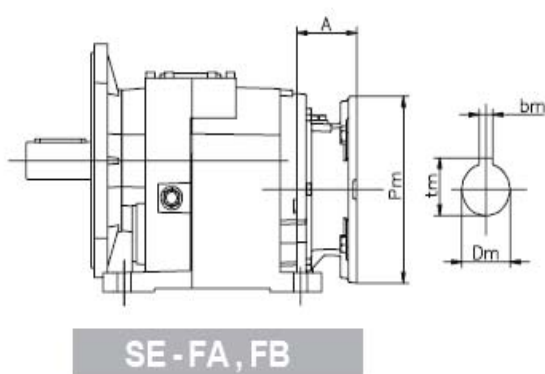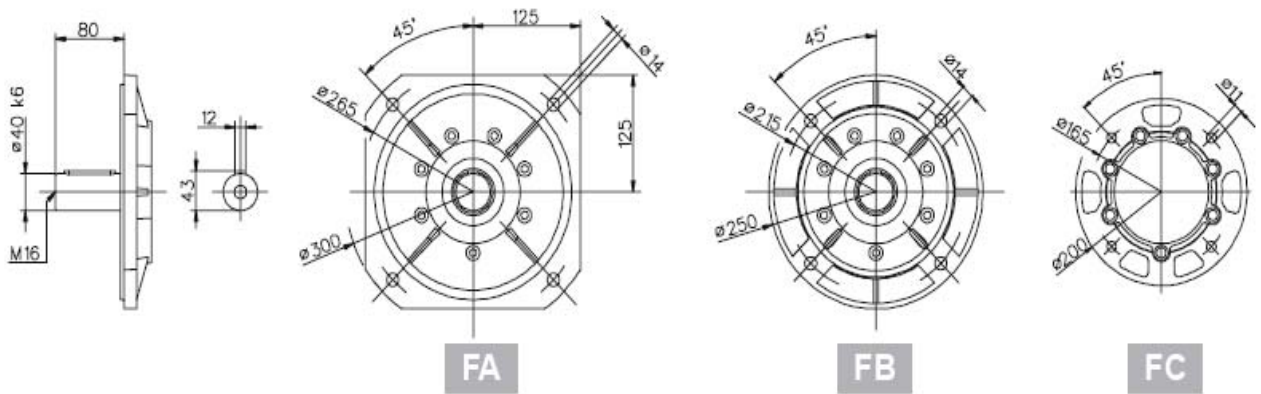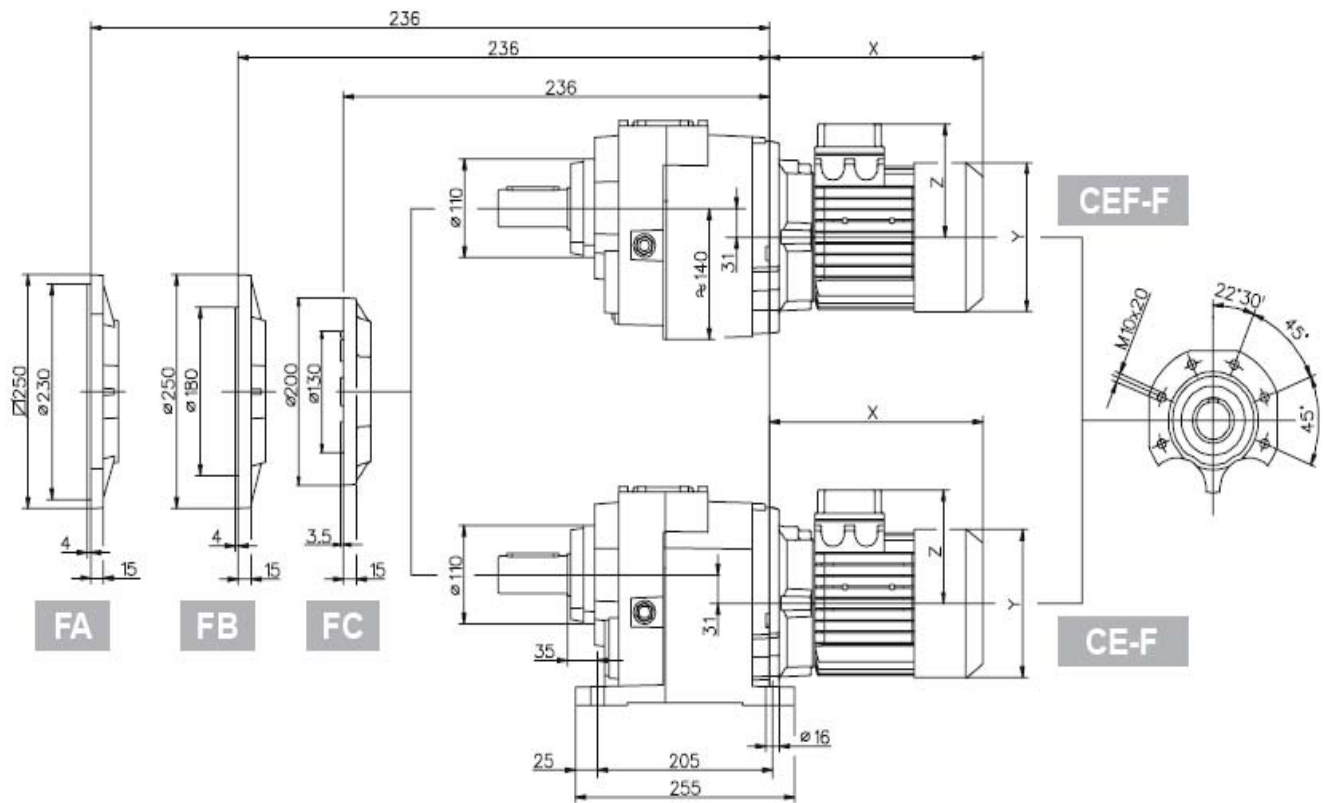








【 SE 87 】 Dimensions 尺寸圖

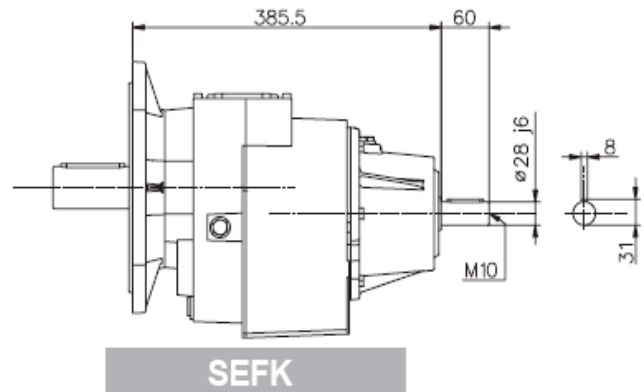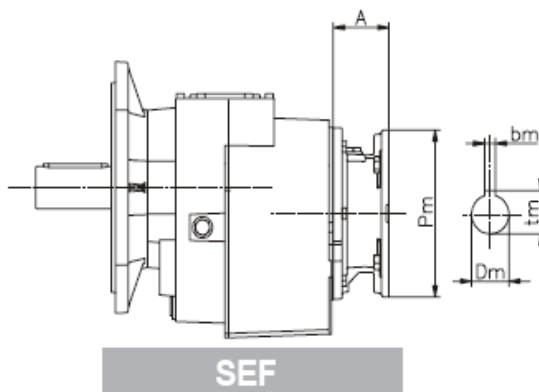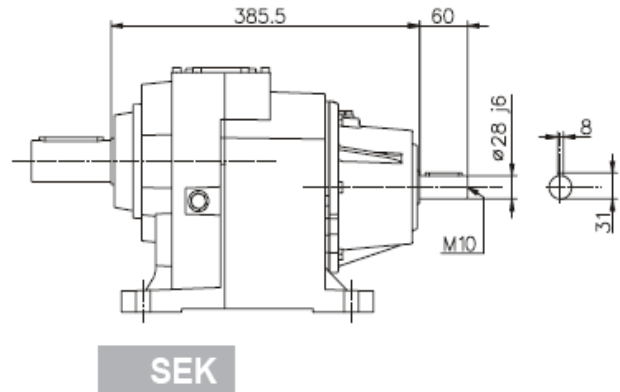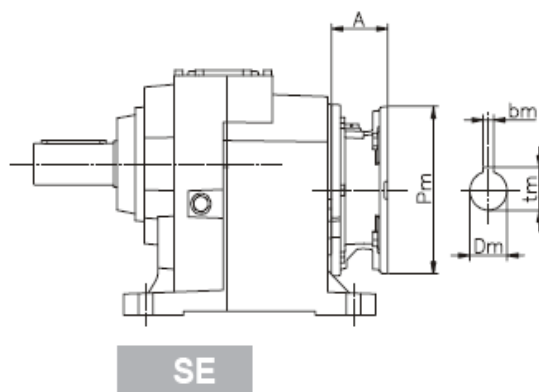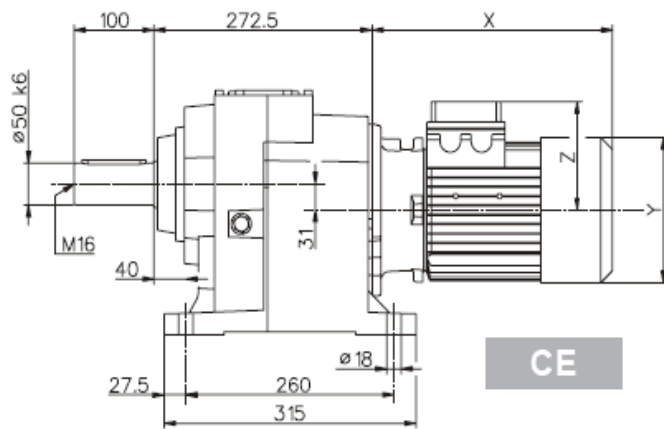

080	IH	PAM		標準馬達 Moteur normal / Motor normal			制車馬達 Moteur frein / Motor-freno				
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
80		70	53,1	248	158	122	59,7	321	158	137	63,2
90s		70	53,1	276	173	130	62,1	353	173	130	67,6
90l		70	53,1	301	173	130	63,6	378	173	130	69,1
100		85	55,2	335	191	139	68,7	417	191	139	74,2
112	57,1	85	55,2	356	211	154	80,1	453	211	154	89,8
132s		110	57,2	396	249	194	94,1	495	249	194	104,4
132m		110	57,2	443	249	194	105,7	547	249	194	120,4
160s		158	64,5	522	310	244	-	-	-	-	-
160l		158	64,5	566	310	244	-	-	-	-	-

For the dimensions concerning the motor connection area (Pm,Dm,bm,tm) please refer to the table shown at page 35 .
減速機與馬達的連結尺寸(Pm,Dm,bm,tm)請參考 35 頁.







【 SE 87 】 Dimensions 尺寸圖

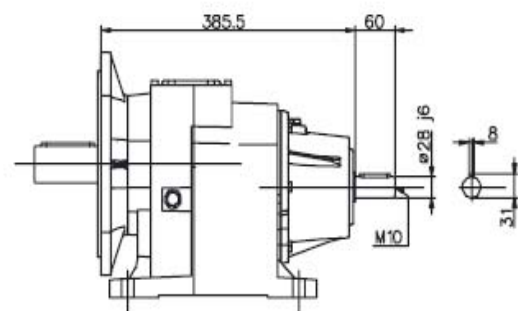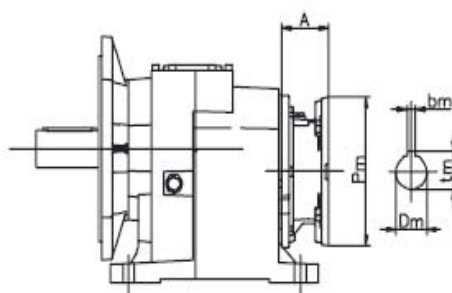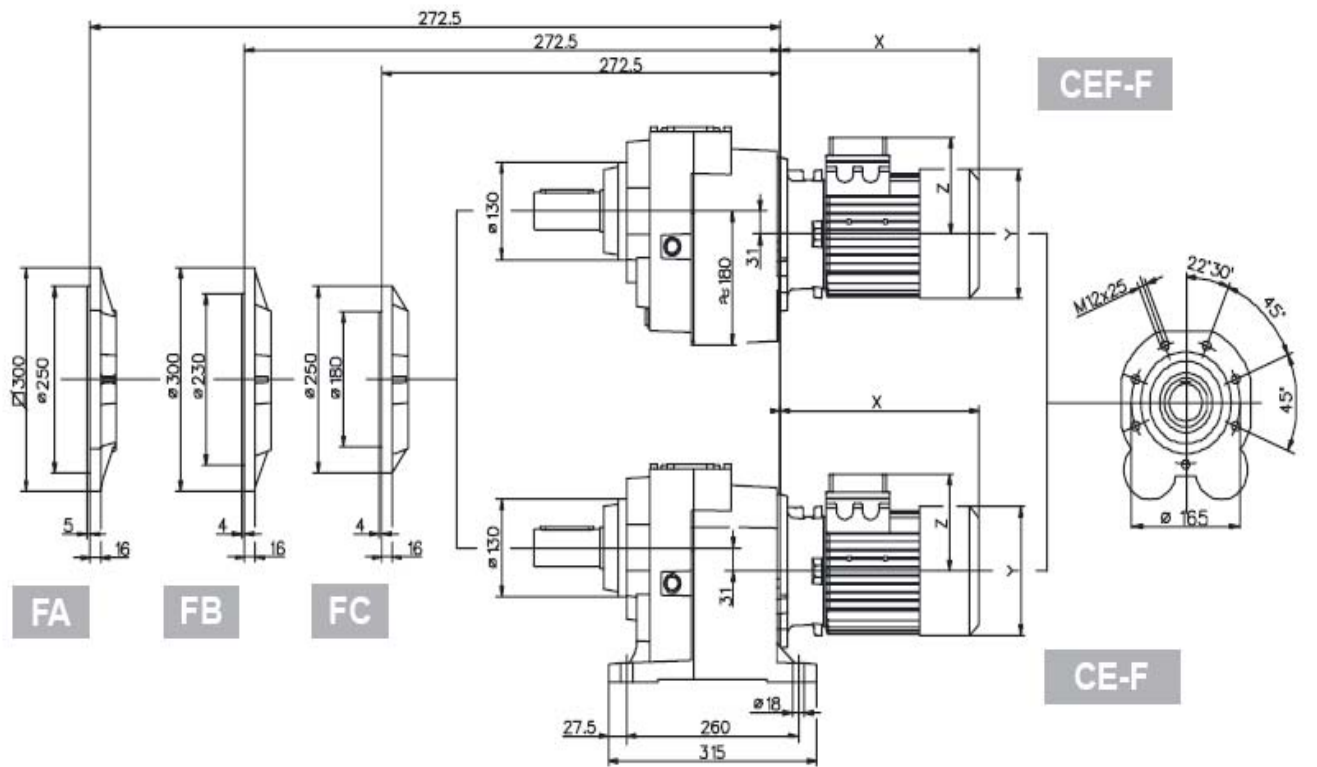

SE - FA, FB

SEK - FA, FB




【 SE 97 】 Dimensions 尺寸圖

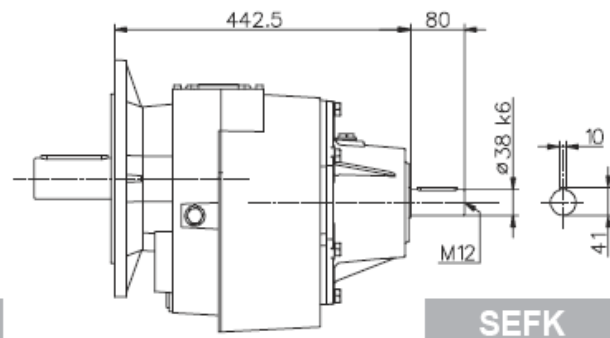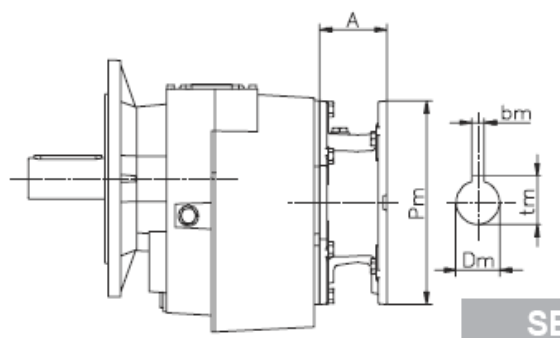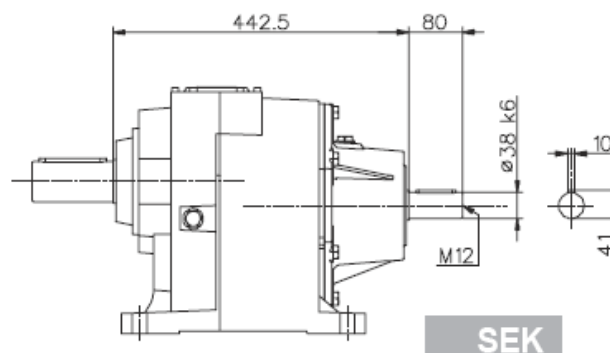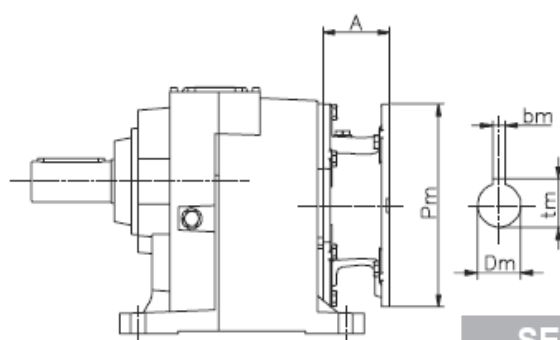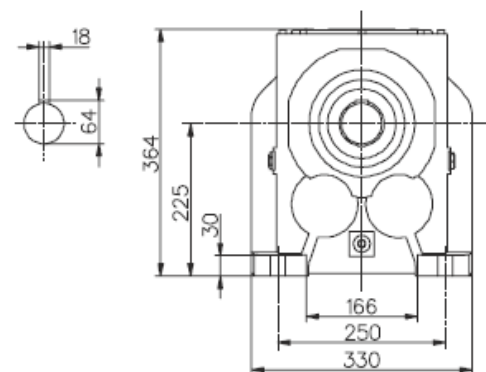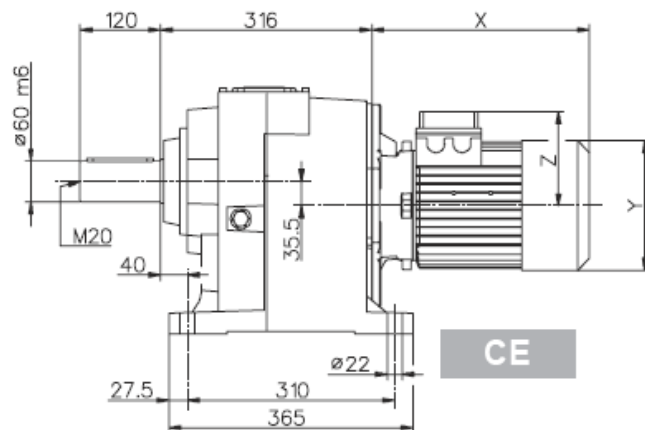


100	IH	PAM		標準馬達 Moteur normal / Motor normal				刹車馬達 Moteur frein / Motor-freno			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
90s	94,7	61	84,8	267	173	130	93,8	343	173	130	99,4
90l		61	84,8	292	173	130	94,8	368	173	130	100,4
100		76	87,1	326	191	139	100,8	407	191	139	106,4
112		76	87,1	347	211	154	110,8	443	211	154	120,6
132s		101	89,9	386	249	194	125,8	485	249	194	136,2
132m		101	89,9	434	249	194	134,8	537	249	194	149,6
160s		148	95,9	540	310	244	-	-	-	-	-
160l		148	95,9	584	310	244	-	-	-	-	-
180		148	95,9	641	349	260	-	-	-	-	-

For the dimensions concerning the motor connection area (Pm,Dm,bm,tm) please refer to the table shown at page 35.
減速機與馬達的連結尺寸(Pm,Dm,bm,tm)請參考 35 頁。


【 SE 97 】 Dimensions 尺寸圖

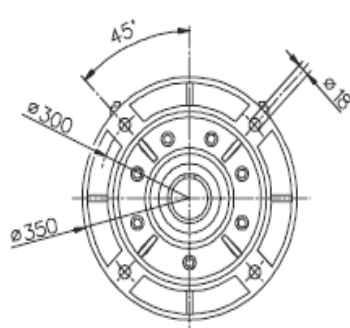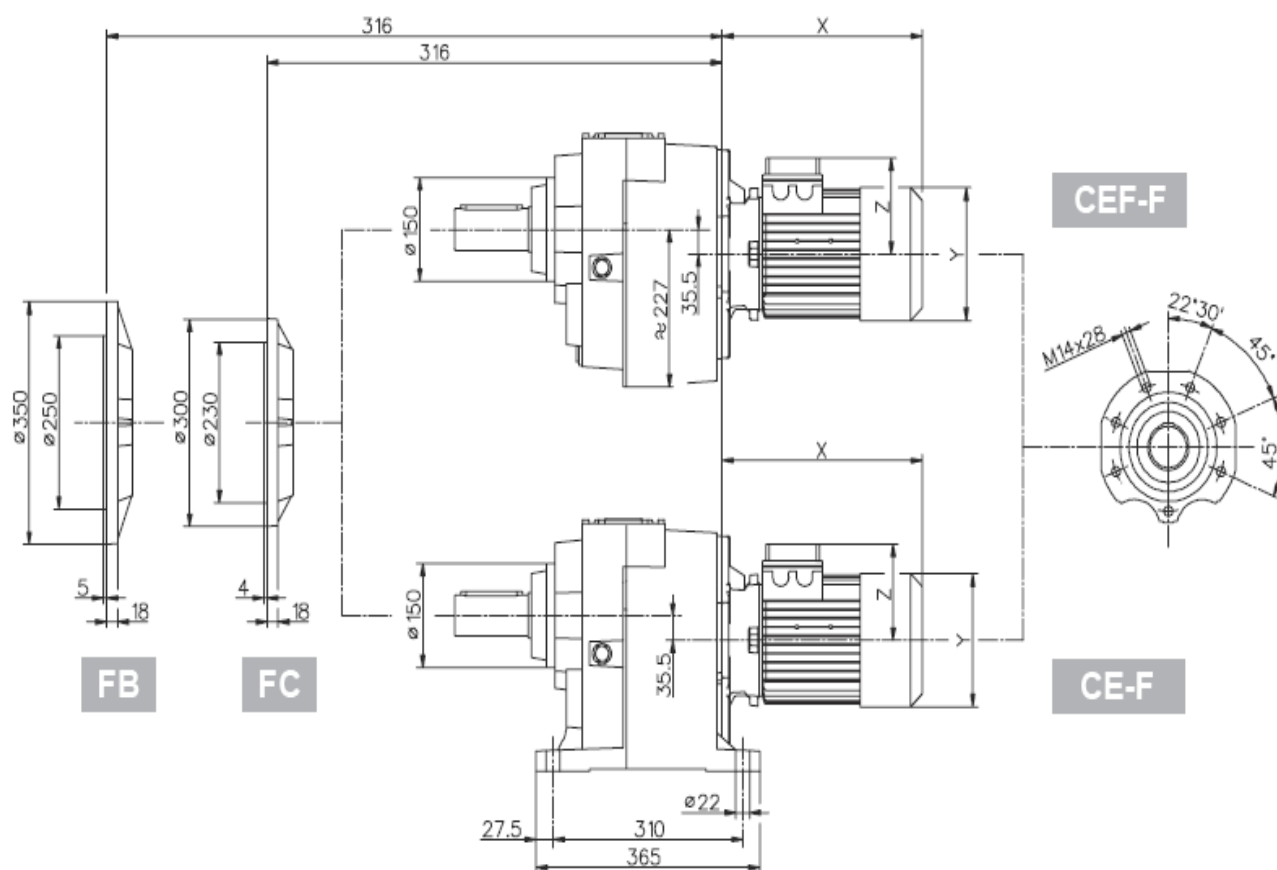


FB



FC






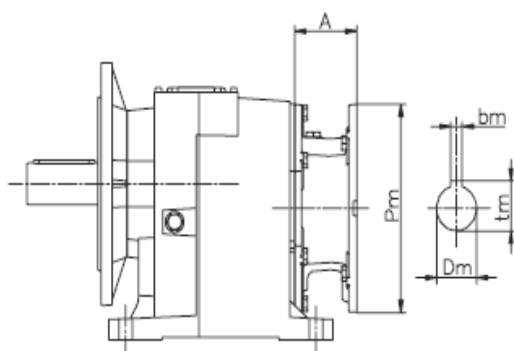


SE - FA, FB

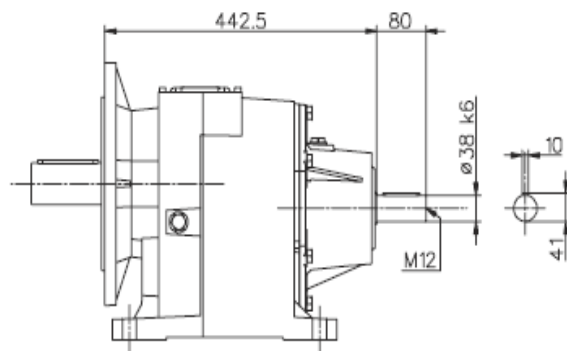

SEK - FA, FB






【 SE 107 】 Dimensions 尺寸圖

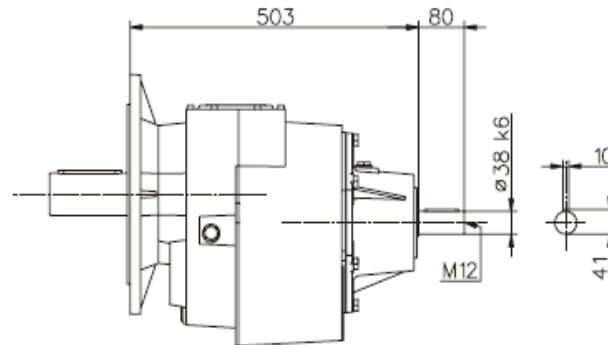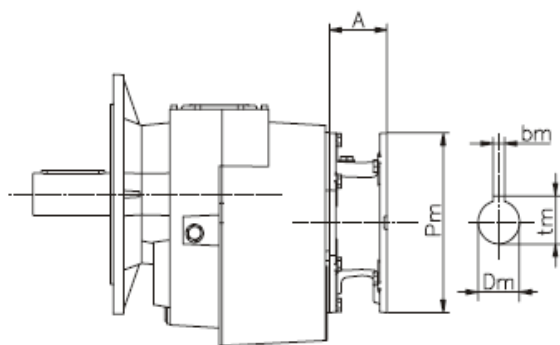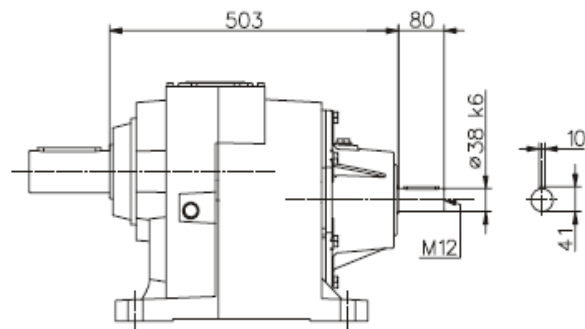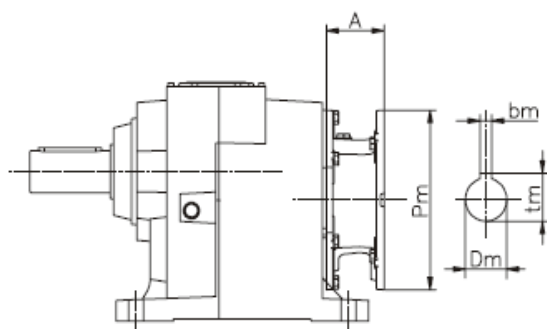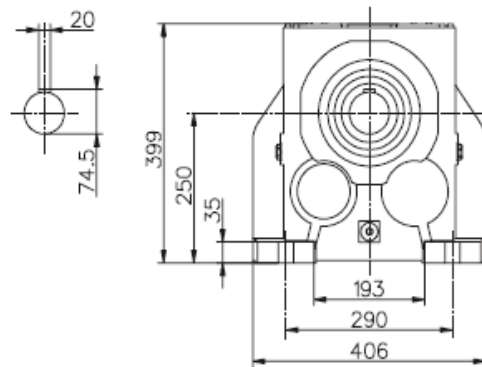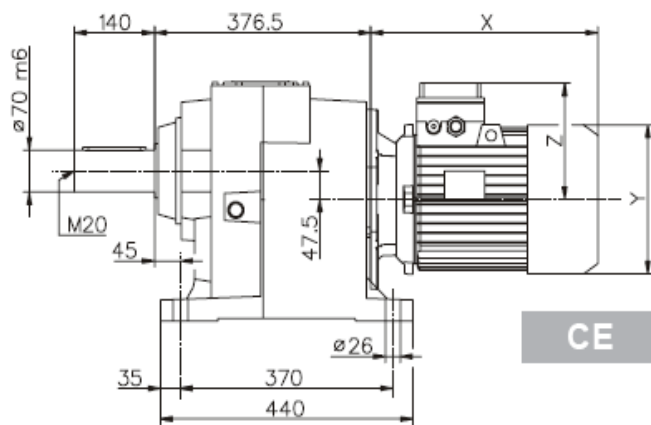


125	IH	PAM		標準馬達 Moteur normal / Motor normal			剎車馬達 Moteur frein / Motor-freno				
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
100	128,3	76	120,7	326	191	151	134,5	407	191	139	140
112		76	120,7	347	211	166	144,5	443	211	154	154,2
132s		101	123,5	386	249	206	159,5	485	249	194	169,8
132m		101	123,5	434	249	206	168,5	537	249	194	183,2
160s		148	129,5	540	310	256	-	-	-	-	-
160l		148	129,5	584	310	256	-	-	-	-	-
180		148	129,5	641	349	272	-	-	-	-	-
200		185	144,5	-	-	-	-	-	-	-	-

For the dimensions concerning the motor connection area (Pm,Dm,bm,tm) please refer to the table shown at page 35 .
減速機與馬達的連結尺寸(Pm,Dm,bm,tm)請參考 35 頁.



【 SE 107 】 Dimensions 尺寸圖

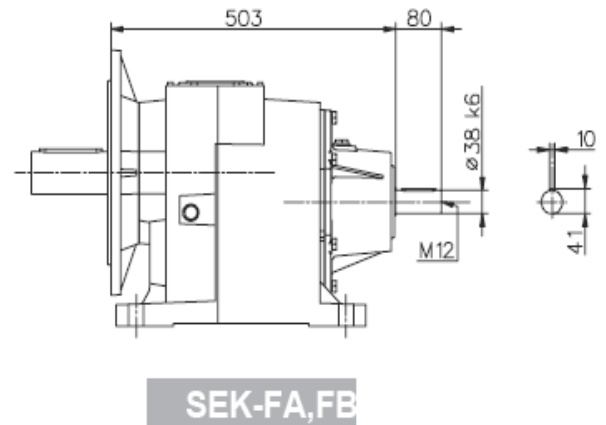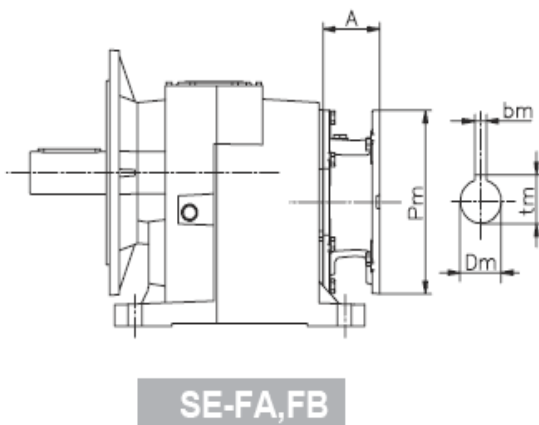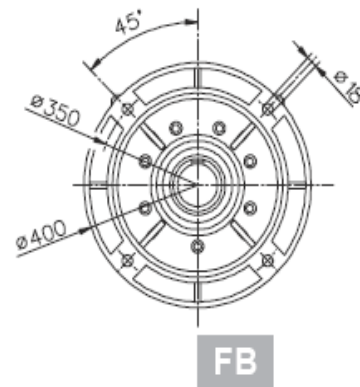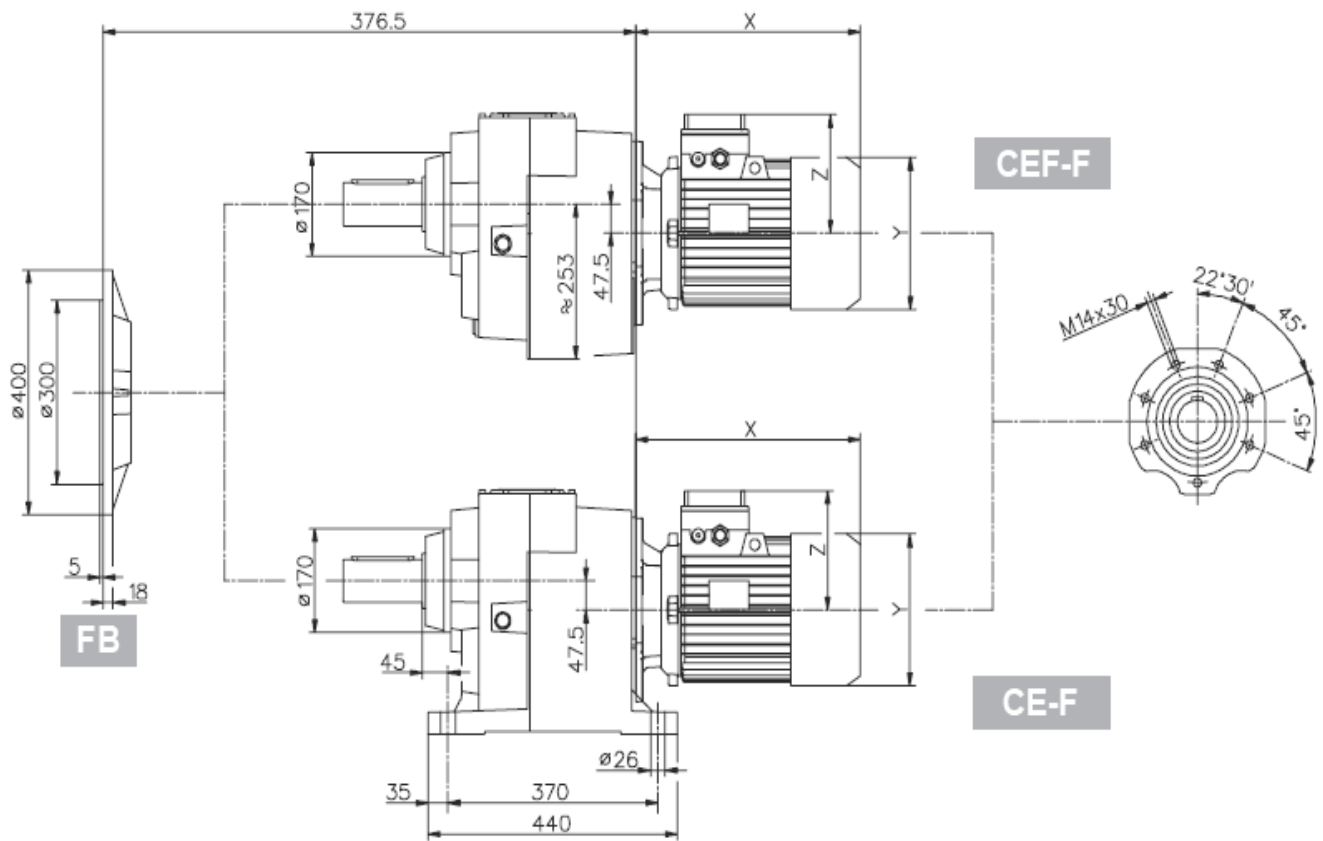


【 SE 137 】 Dimensions 尺寸圖

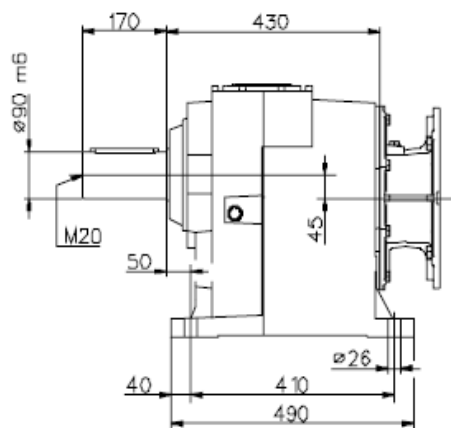


CE

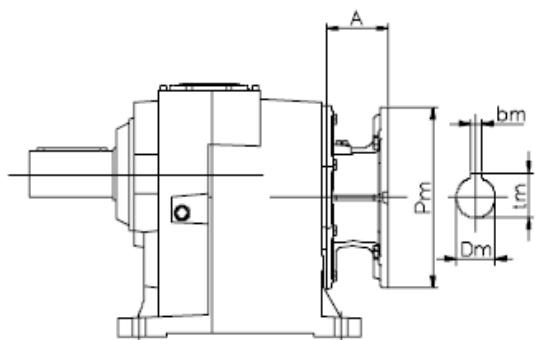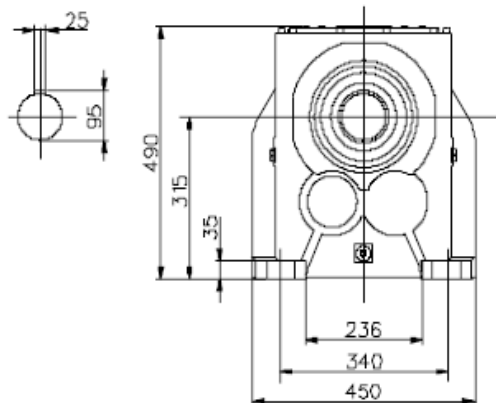


SE

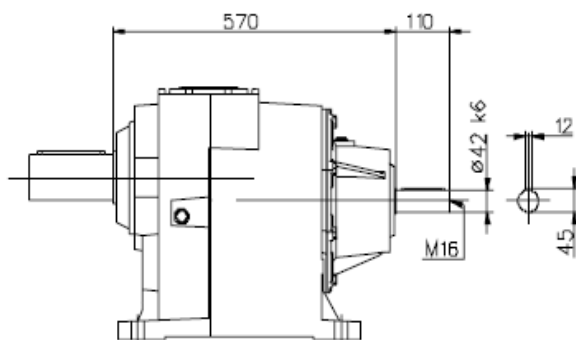

SEK

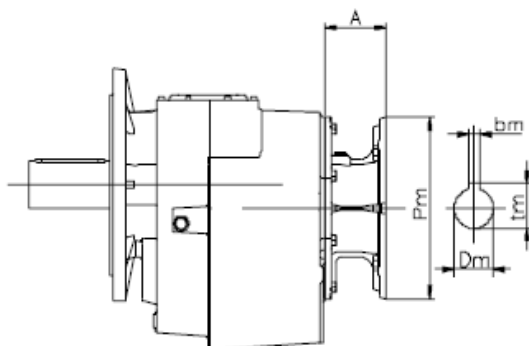

SEF



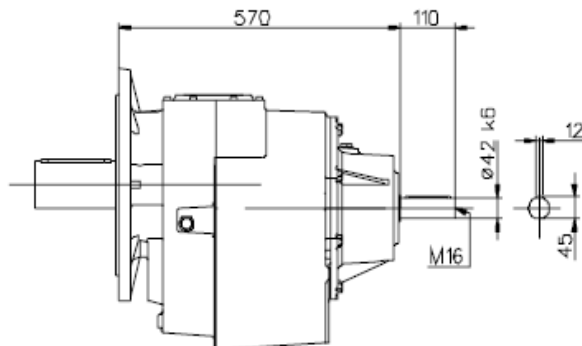


SEKF


140	IH	PAM		標準馬達 Moteur normal / Motor normal				剎車馬達 Moteur frein / Motor-freno			
	~Kg	A	~Kg	X	Y	Z	~Kg	X	Y	Z	~Kg
132s	212,2	76	197,1	-	-	-	-	-	-	-	-
132m		76	197,1	-	-	-	-	-	-	-	-
160s		124	205	-	-	-	-	-	-	-	-
160l		124	205	-	-	-	-	-	-	-	-
180		124	205	-	-	-	-	-	-	-	-
200		161	219,2	-	-	-	-	-	-	-	-
225		161	221	-	-	-	-	-	-	-	-

For the dimensions concerning the motor connection area (Pm,Dm,bm,tm) please refer to the table shown at page 35.
減速機與馬達的連結尺寸(Pm,Dm,bm,tm)請參考 35 頁.


【 SE 137 】 Dimensions 尺寸圖

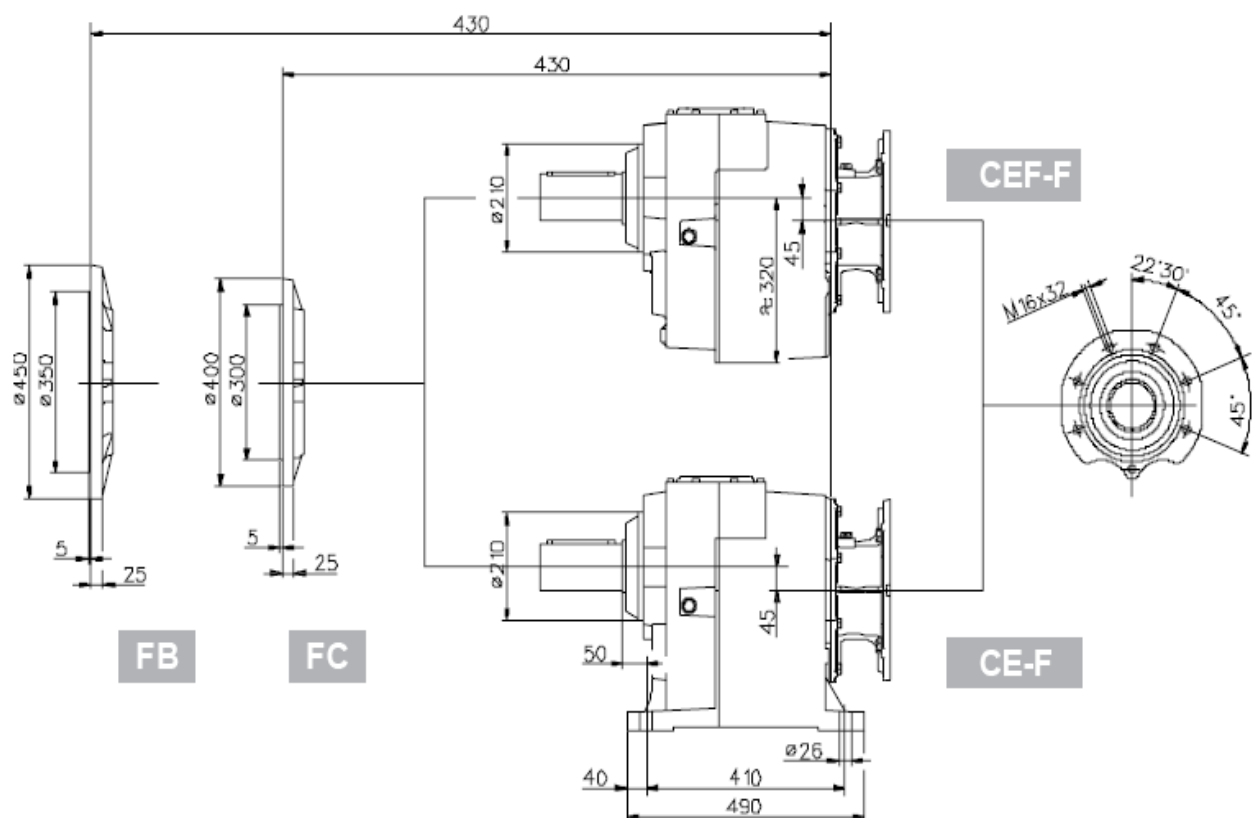


FB



FC

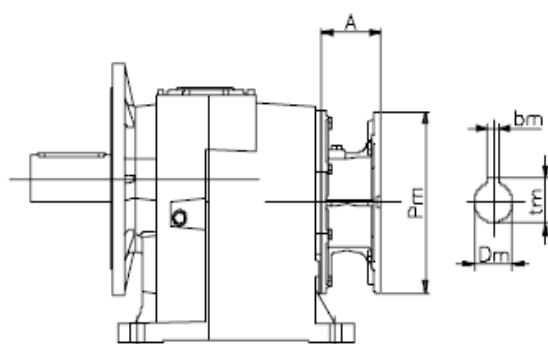


SE - FA , FB

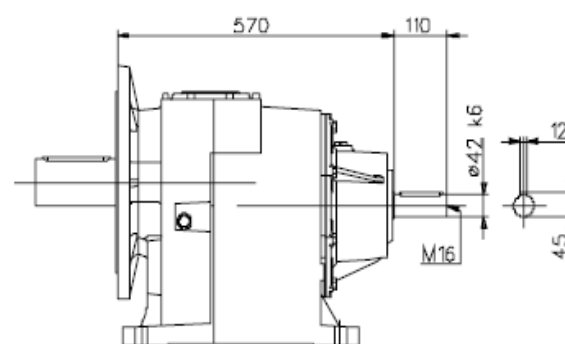


SEK - FA,FB

【 PAM B5】 Dimensions 尺寸圖

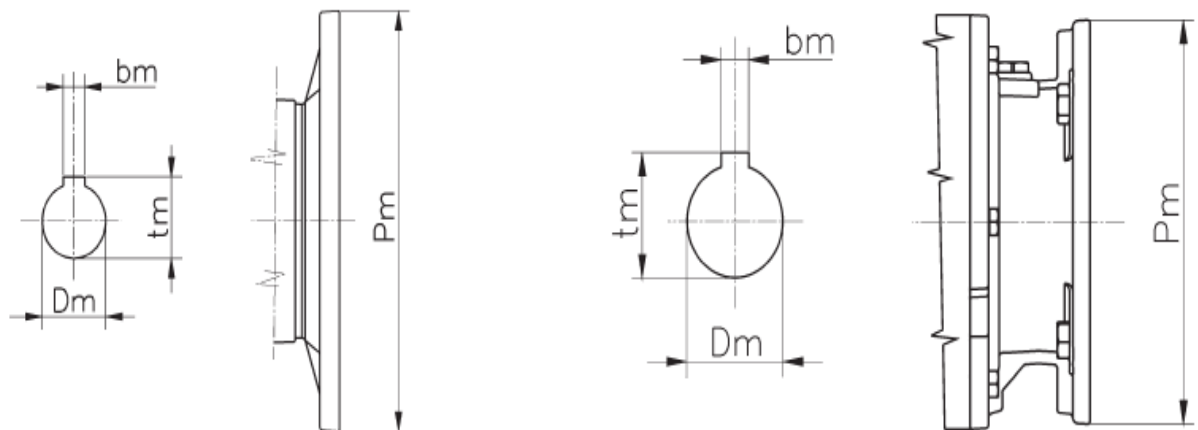

B5	IEC										
	063	071	080	090	100	112	132	160	180	200	225
Pm	140	160	200	200	250	250	300	350	350	400	450
Dm	11	14	19	24	28	28	38	42	48	55	60
bm	4	5	6	8	8	8	10	12	14	16	18
tm	12,8	16,3	21,8	27,3	31,3	31,3	41,3	45,3	51,8	59,3	64,4

【 PAM B14】 Dimensions 尺寸圖

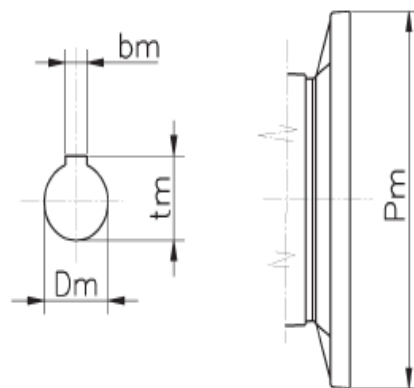

B14	IEC						
	056	063	071	080	090	100	112
Pm	80	90	105	120	140	160	160
Dm	9	11	14	19	24	28	28
bm	3	4	5	6	8	8	8
tm	10,4	12,8	16,3	21,8	27,3	31,3	31,3